
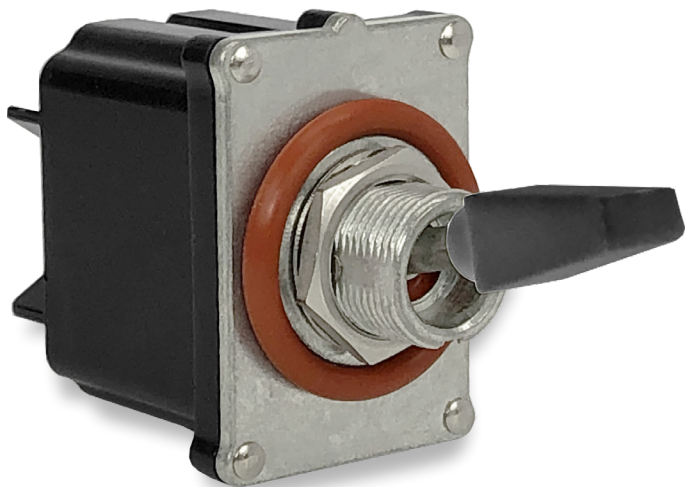


# ST-Series

Sealed Toggle Switches

**PRODUCT WEBPAGE**

*request sample, configure part, watch video*

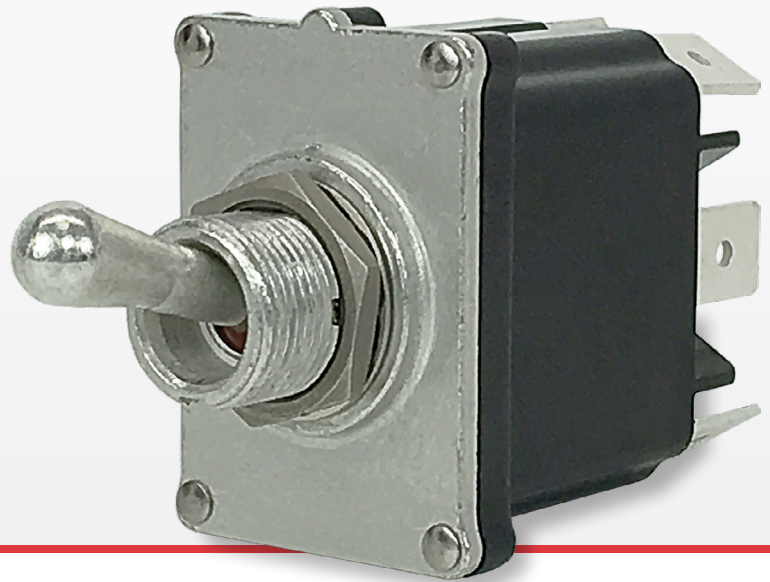

Designed to conform to MIL-DTL-3950G requirements for environmentally sealed toggle switches, and compliant to UL 60079-15 standard for use in explosive gas atmospheres. The ST-Series is fully sealed to IP68, including below the panel and features innovative design and performance principles sure to withstand the most demanding applications.

**1-2**  
Poles

**10-16**  
Amps

**125, 250**  
VAC

**12-24**  
VDC

## Typical Applications

- Off-Highway
- Commercial Food
- Marine
- Armored Vehicles
- Military
- Applications requiring stringent sealing

# Design Features

## **PINNED ACTUATOR / BUSHING**

Keeps toggle or paddle firmly in place and prevents rotation

## **BRASS ROLLER PIN**


Provides rolling metal on metal actuation for maximum endurance

## **BASE SEAL CHANNEL**

Perfectly fits the toggle assembly seal decreasing the dependence on clamping forces and rivets

## **TERMINAL BARRIERS**

Comply with UL-61058-1 electrical spacing requirements

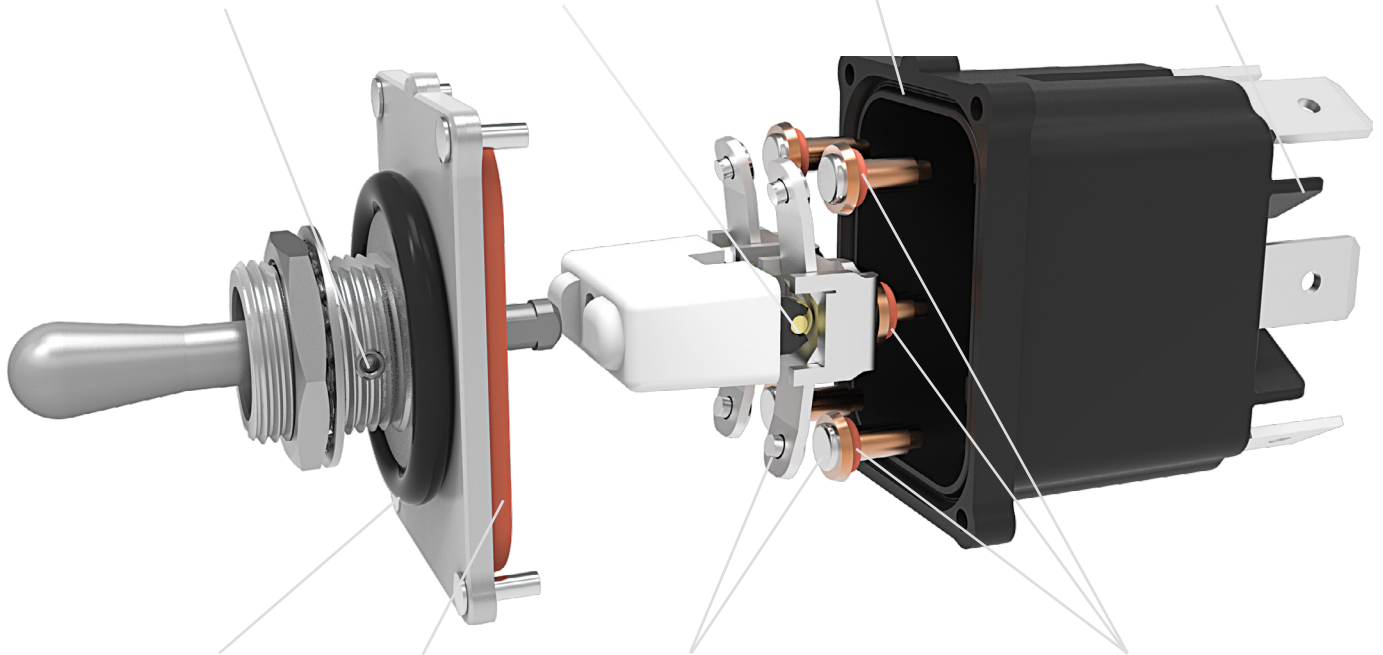

## **OPTIONAL O-RING**

Assures additional under panel sealing protection

## **BUSHING/TOGGLE SEAL**

Composed of dynamic silicone material that bonds to the metal toggle, pin, and bushing

## **RIVETS**

High purity copper composite and silver alloy materials handle various electrical loads and maintain low contact resistance

## **TERMINAL SEALS**

Assure a secure seal at extreme temperatures. Eliminates potential for separated joints associated with insert molded constructions

# Tech Specs

## Electrical

Contact Rating	10A 250VAC, 15A 125VAC, 16A 12/24VDC
Dielectric Strength	MIL-STD-202G, Method 301 (1500 Volts RMS)
Insulation Resistance	MIL-STD-202G, Method 302 (50 MegOhms, 500 VDC)
Initial Contact Resistance	MIL-STD-202G, Method 307 (10 milliOhms max.)
Insulation Resistance	Overload: MIL-DTL-3950G, Section 4.8.11.1 Electrical Endurance and Temperature: UL 61058-1 Momentary circuits: 25,000 operations, minimum. Maintained circuits: 50,000 operations, minimum.
Initial Contact Resistance	UL-1500 Ignition-Protection Test for Marine Products
Ignition Protection	Up to 100,000 cycles, circuit and load dependent
Explosion Protection	UL 60079-15 Electrical Apparatus for Explosive Gas Atmospheres
Contacts	Silver / Nickel Alloy
Terminals	Brass or Copper / silver plated. Tab Terminal: ¼" quick-connect Screw Terminal: #6-32 brass screw and cage clamp MIL-STD-202G, Method 211 Test Condition A, and B: 25 lb. pull test, two terminal bends.

## Agency Approvals

UL and cUL  
Reference: UL 61058-1 and CAN/CSA-C22.2 No. 61058-1-09, Switches for Appliances - Part 1: General Requirements. Certificate number 20181012-E7560.  
UL 1500 Ignition-Protection.  
UL 60079-15 Electrical Apparatus for Explosive Gas Atmospheres.

## Environmental

Temperature	Operating: -40°C to +85°C Storage: -65°C to +85°C										
Vibration	MIL-STD-202G: Method 204D, Test Condition A (10 G peak, Harmonic, 10Hz to 500Hz sweeps, 9 hours total).										
Shock	MIL-STD-202G: Method 213B, Test Condition K (30 G, half sine)										
Sealing	IP68, for above and below-panel components of actual switch only.										
Salt Atmosphere	MIL-STD-202G, Method 101, Test Condition A (96 hrs)										
Thermal Shock	MIL-STD-202G, Method 107, Test Condition A (five cycles in air: -55°C, +25°C, +125°C, +25°C)										
Moisture Resistance, Humidity	MIL-STD-202G, Method 106 (ten 24-hour stepped cycles)										
Chemical Resistance	No permanent loss of function, obvious loss of sealing, distortion, softening, embrittlement, discoloration or corrosion after being brushed for 10 minutes, wetting all exposed surfaces. Relevant chemical compatibility documentation may be used in place of testing. <table> <tr> <td>Chemical</td><td>Concentration</td></tr> <tr> <td>Gasoline</td><td>100%</td></tr> <tr> <td>Ethylene Glycol</td><td>50% in water</td></tr> <tr> <td>Ethanol/Methanol</td><td>10% in water</td></tr> <tr> <td>Diesel Fuel</td><td>100%</td></tr> </table>	Chemical	Concentration	Gasoline	100%	Ethylene Glycol	50% in water	Ethanol/Methanol	10% in water	Diesel Fuel	100%
Chemical	Concentration										
Gasoline	100%										
Ethylene Glycol	50% in water										
Ethanol/Methanol	10% in water										
Diesel Fuel	100%										

## Physical

Function, Operation, Circuits	Single Pole/ Double Pole with Circuits Single Throw/ Double Throw, Two/Three position, Maintain/ Momentary circuits
Toggle	Tin plated brass bat or tall bat
Paddle	Acetal, UV stabilized yellow, red, white and black.
Mechanism Actuator	Polyester PBT, UL94-V0 and fungus resistant per MIL-STD- 810G, Section 508.6
Internal Seals	Silicone per A-A-59588-1A.
Mounting, Hardware	15/32"-32 UNS-2A threaded bushing with a keyway. A single nut and lock washer are supplied unassembled.
Bushing/Top Plate	Zinc/aluminum die cast, with tin plating.
Base	Polyester PBT, UL94-V0 and fungus resistant per MIL-STD- 810G, Section 508.6
Actuation Force	Initial Actuation Forces ± 0.3 lb (for 2-Pole circuits, short bat)
Angular Movement	14.5 degrees, each side of center

# Ordering Scheme

Sample Part Number **ST A 2 E 1 - 53**

Selection 1 2 3 4 5 6

## 1. SERIES

**ST** Sealed Toggle

## 2. CIRCUIT

	2 & 3, 5 & 6 Connected Terminals		1 & 2, 4 & 5
Position:	1	2	3
<b>A</b>	ON	NONE	OFF
<b>B</b>	(ON)	NONE	OFF
<b>C</b>	ON	NONE	(OFF)
<b>D</b>	ON	NONE	ON
<b>F</b> <sup>6</sup>	ON	NONE	(ON)
<b>J</b>	ON	OFF	ON
<b>K</b>	ON	OFF	(ON)
<b>L</b>	(ON)	OFF	(ON)
Special Circuits <sup>6</sup>			
<b>E</b> <sup>2,3</sup>	5 & 6	5 & 3	5 & 1
<b>G</b> <sup>2,4</sup>	2 & 3, 5 & 6	2 & 3	OFF
<b>M</b> <sup>2,4</sup>	(2 & 3, 5 & 6)	2 & 3	OFF

## 3. POLES

- 1** Single pole using terminals 1, 2 & 3
- 2** Double pole using terminals 1, 2, 3, 4, 5 & 6

### Notes:

- 1 Standard hardware is (1) inner tooth lock washer and (1) hex nut bulk.
- 2 Available only with 2 pole option in selection box # 3.
- 3 External customer supplied jumper required between terminals 2 & 4 to get SP ON-ON-ON circuit.
- 4 Available with termination B and E only.
- 5 Available with special circuit G and M only.
- 6 Not available with rating 5.
- 7 Available with termination 1 and 4 only.

## 4. RATING

- 4** 10A 250VAC; 15A 125VAC
- 5**<sup>7</sup> 10A 250VAC; 15A 125VAC (UL, cUL Recognized)
- E** 16A, 12/24VDC

## 5. TERMINATION

- 1** .250 (6.4mm) TAB (QC)
- 4** Screw with Cage Clamps
- B**<sup>5</sup> .250 (6.4mm) TAB (QC). Jumper T2 to T5.  
No terminal at T5
- E**<sup>5</sup> Screw with Cage Clamps. Jumper T2 to T5.  
No terminal at T5

## 6. ACTUATOR STYLE

### TOGGLE (SEALED METAL)

Without Panel Seal	With Panel Seal (Bulk)	Toggle Color	Toggle Length	Bushing Length
<b>53</b>	<b>58</b>	Dull Nickel	.561	.385
<b>73</b>	<b>78</b>	Dull Nickel	.687	.385

### PADDLE (SEALED PLASTIC)




Without Panel Seal	With Panel Seal (Bulk)	Paddle Color	Paddle Length	Bushing Length
<b>B3</b>	<b>B8</b>	Black	.880	.385
<b>W3</b>	<b>W8</b>	White	.880	.385
<b>R3</b>	<b>R8</b>	Red	.880	.385
<b>Y3</b>	<b>Y8</b>	Yellow	.880	.385

[Configure Complete Part Number >](#)

[Browse Standard Parts >](#)

# Dimensional Specs

inches [millimeters]

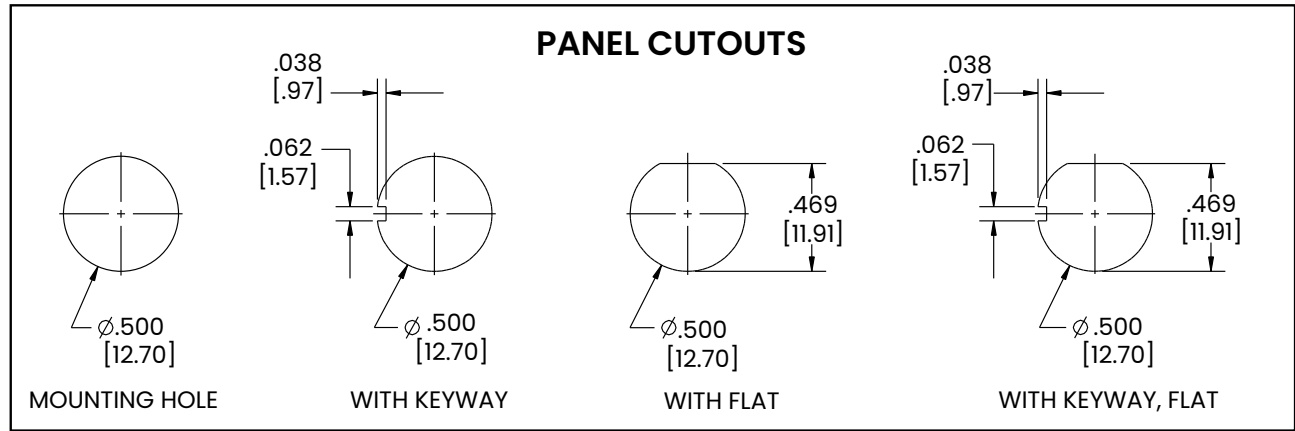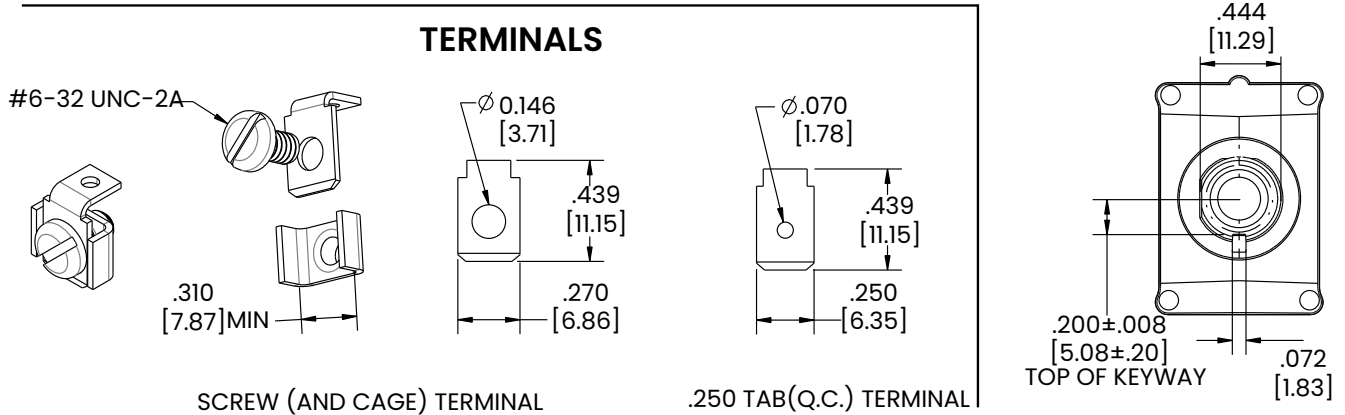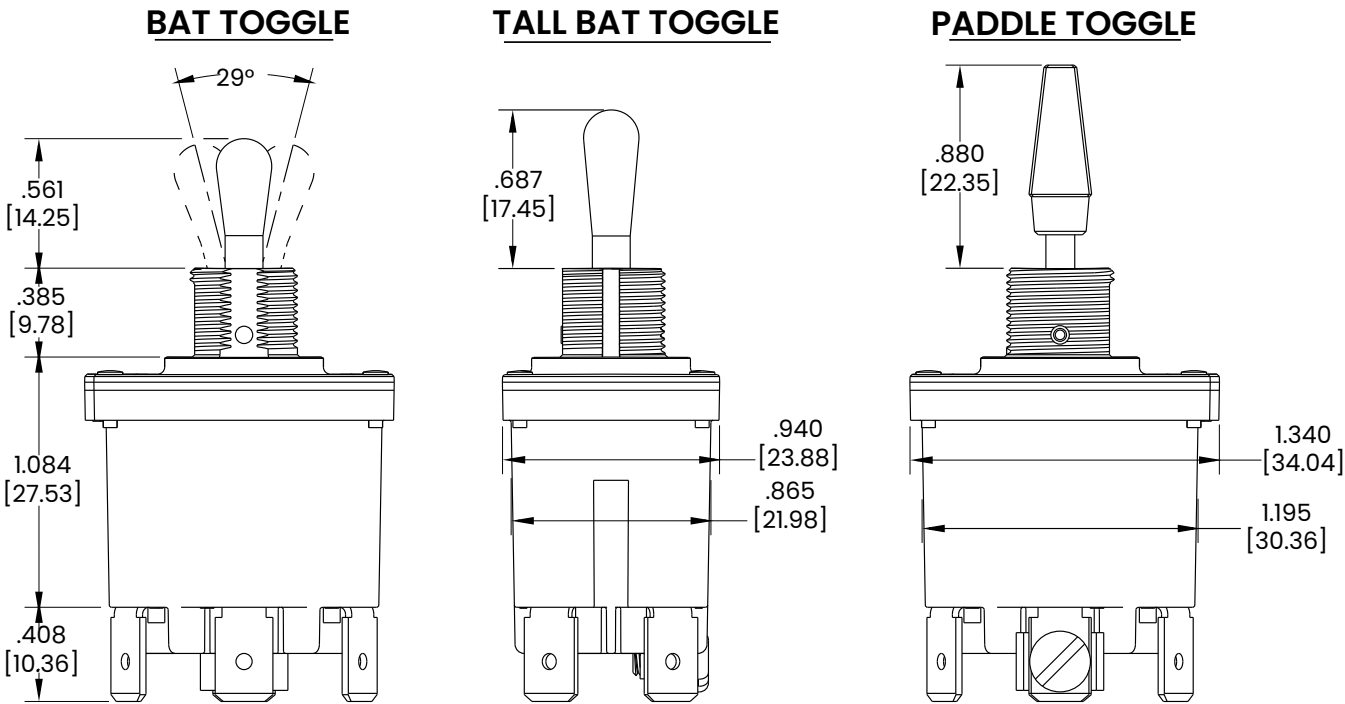

## Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit [www.carlingtech.com/findarep](http://www.carlingtech.com/findarep).



## About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With six ISO9001 and IATF16949 registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit [www.carlingtech.com/company-profile](http://www.carlingtech.com/company-profile).

To view all of Carling's environmental, quality, health & safety certifications please visit [www.carlingtech.com/environmental-certifications](http://www.carlingtech.com/environmental-certifications).