


SPST

SP-11SP

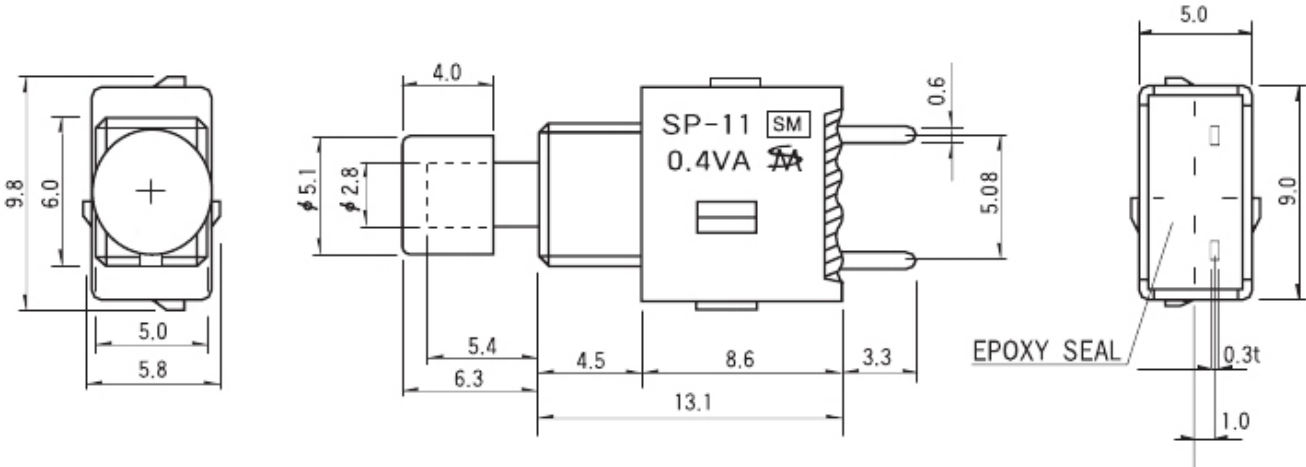

Order Code Order 选型表

Type	Poles	Circuit	Push Length	Terminals	SMD Type
ex) SP	1	2	S	H	S

General Specification 产品性能

1. Rating 工作电流, 电压	0.4VA at 28V AC or DC Max.
2. Contact Resistance 接触电阻	Max 50m Ω
3. Insulation Resistance 绝缘电阻	Min 500M Ω , at DC 500V
4. Operating Force	1 Minute at AC 500V

1 Single

1 OFF-(ON)

2 ON-(ON)

() : Momentary

F 0 mm

P 3.3 mm

S 5.4 mm

L 7.8 mm

P Straight

B Straight W / Bracket

H Right Angle W / Bracket

V Vertical W / Bracket


操作力

5. Life Cycle 250±100gf (1 pole),
使用寿命 350±100gf (2pole)

6. Travel 1.1mm
移动

7. Ambient Temp. Range -30℃ ~ + 85℃
环境温度范围

8. Solder Conditions 5 sec, 270℃
焊接方式

MODEL	POLES	CIRCUIT		SCHEMATICS
		NORMAL	DOWN	
SP-11	SPST	OFF	(ON)	
SP-12	SPDT	ON 2-3	(ON) 1-2	