

JS-606 (S.P rocker switch) / JS-606P (DP. rocker switch)

SPECIFICATIONS

- Rating: K/ 6A 125VA/3A 250VAC (UL~CSA)
H/ 10A 125VAC/ 6A 250VAC (UL-KEMA)
L/ 5A 125VAC
T/ 16A 125VAC/10A 250VAC T105
- CONTACT RESISTANCE: 30 mΩ(max)
- Insulation resistance: DC 500V 100MΩ(Min)
- Dielectric strength: 1,000 VAC/ 1minute.
- Safety approval:        

















MATERIALS

- Housing Nylon #66 (UL 94V-2)
- Rocker Nylon #66 (UL 94V-2)
- Terminal: Copper alloy Sn or Ag Plated
- Contact: Ag-cd-O alloy
- Spring: Music wire














(A) 

Model	Circuit	Terminal	Color Rocker/Housing	Stamp	Rating	RoHS code
JS-606	JS-606	Q S SI P PCB R G R1 PCC	B Black	1	K 6A	H = RoHS Compliant
	A 2P ON-OFF		W White	2	H 10A	
	B 3P ON-ON		R Red	3	L 5AL	
	C 3P ON-OFF-ON		G Green	4	T 16A	
	D 2P (ON)-OFF		I Ivory	5		
	E 2P ON-(OFF)		H Gray	6		
	F 3P (ON)-ON		S Slate Gray	7		
	I 2P indicator		Y Yellow	8		
	L 4P with led			9		
	AL 3P illuminated			10		
JS-606P	JS-606P			11		
	A 4P ON-OFF			12		
	B 6P ON-ON			13		
	C 6P ON-OFF-ON			14		
	D 4P (ON)-OFF			15		
	E 4P ON-(OFF)			16		
	F 6P (ON)-ON					
	AA 4P double ON-OFF					
	AB 5P ON-OFF ON-ON					
	BB 6P double ON-ON					
	AI 4P ON-OFF with INDICATOR					

Stamp:
Apply for JS-606


															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

Apply for JS-606P

												
1	2	3	4	5	6	7	8	9	10	11	12	13

JS-606


JS-606C-S-R/B-6-□




JS-606B-R-B/B-1-□




JS-606A-G-B/B-3-□



JS-606I-Q-G/B-1-□

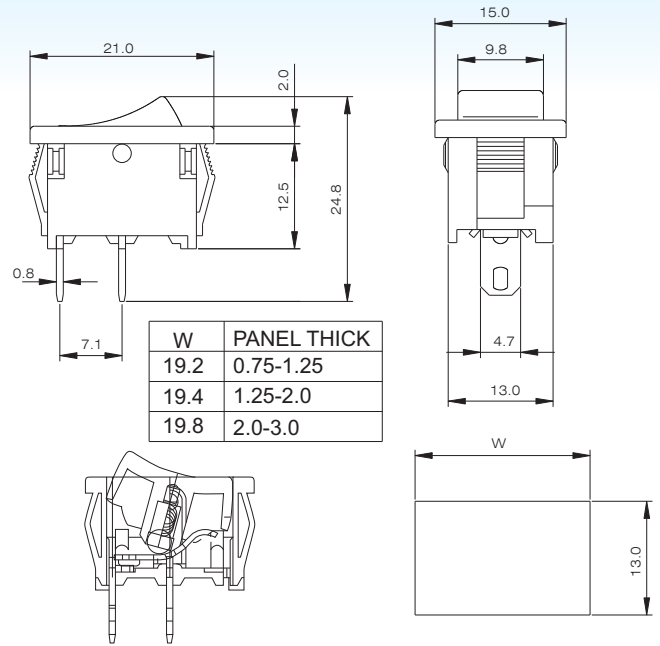

TERMINAL OPTION:

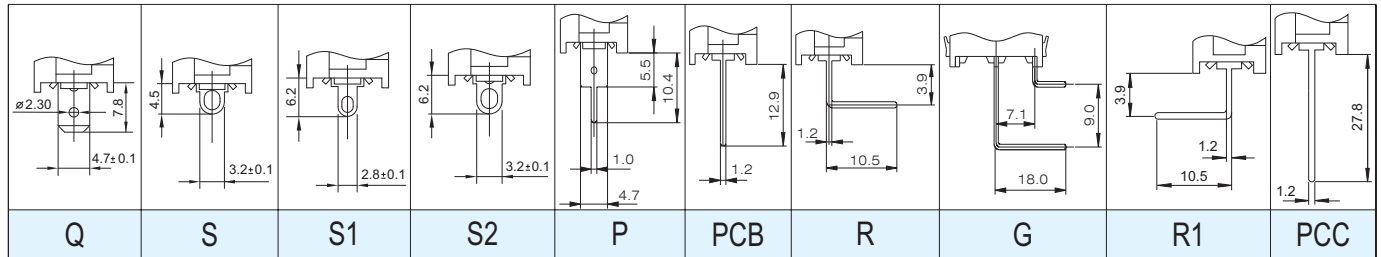

JS-606P

JS-606PA-R-B/B-4-□




JS-606PAA-Q-B/B-1-□



JS-606PB-P-O/B-6-□



JA-606PAI-Q-R/B-2-□

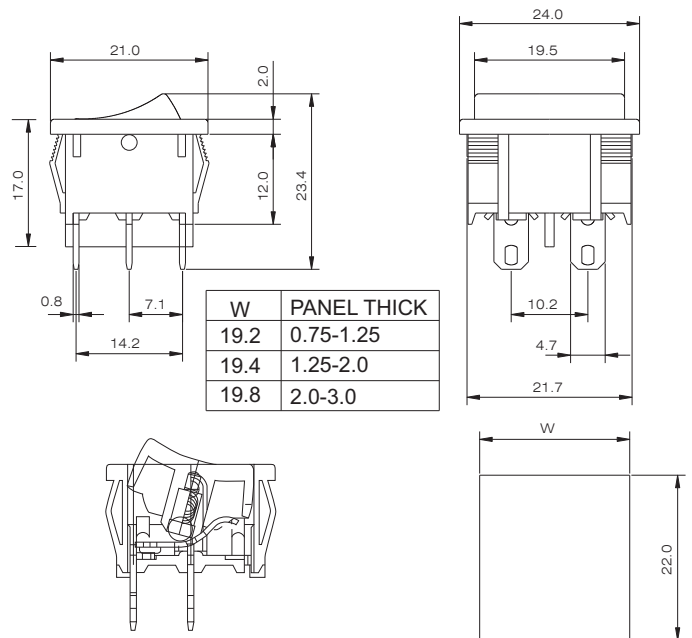

TERMINAL OPTION:

