


CIRCUIT DIAGRAM

SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.20 mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C


PAPT NO	TS-3737-X
Operating Force	B: 160gf C: 260gf
Height	H: 0.4

SWITCH CONNECTOR

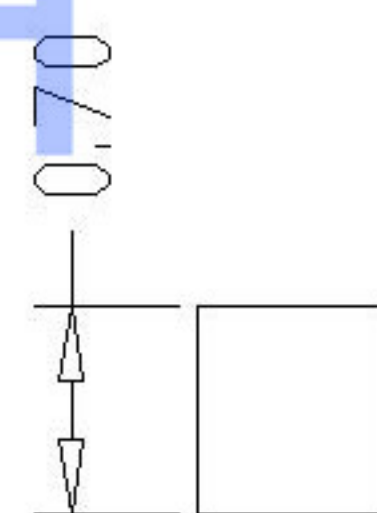

PCB.circuit prohibited area

⑤	Terminal	—	4	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	LCP		—
②	Cover	—	1	kapton filmPI	Tin plated	—
①	Keystake	—	1	PET		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units:	mm	DWN		DATE		VIEW: 	PART NO.:		
△ X					tolerance:		CHKD		DATE		UNIT: mm	DWG NO.:		
△ X					X.X	±0.2mm						TS-3737-X		
△ X					X.XX	±0.1mm	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION			DATE	REVISED	APPROVED	X.XXX	±0.05mm	XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
REVISIONS							UNSPECIFIED TOLERANCES					1.0g	1/1	A0
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn														