
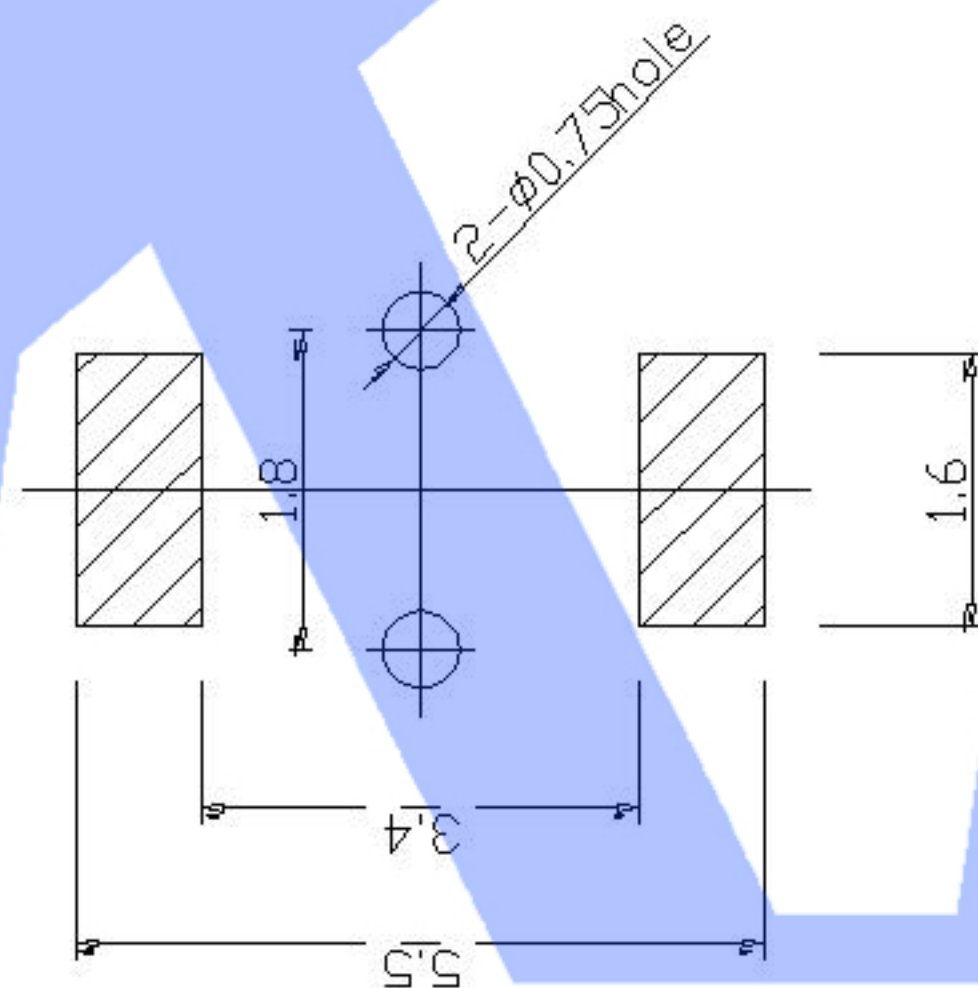


A:With B:without

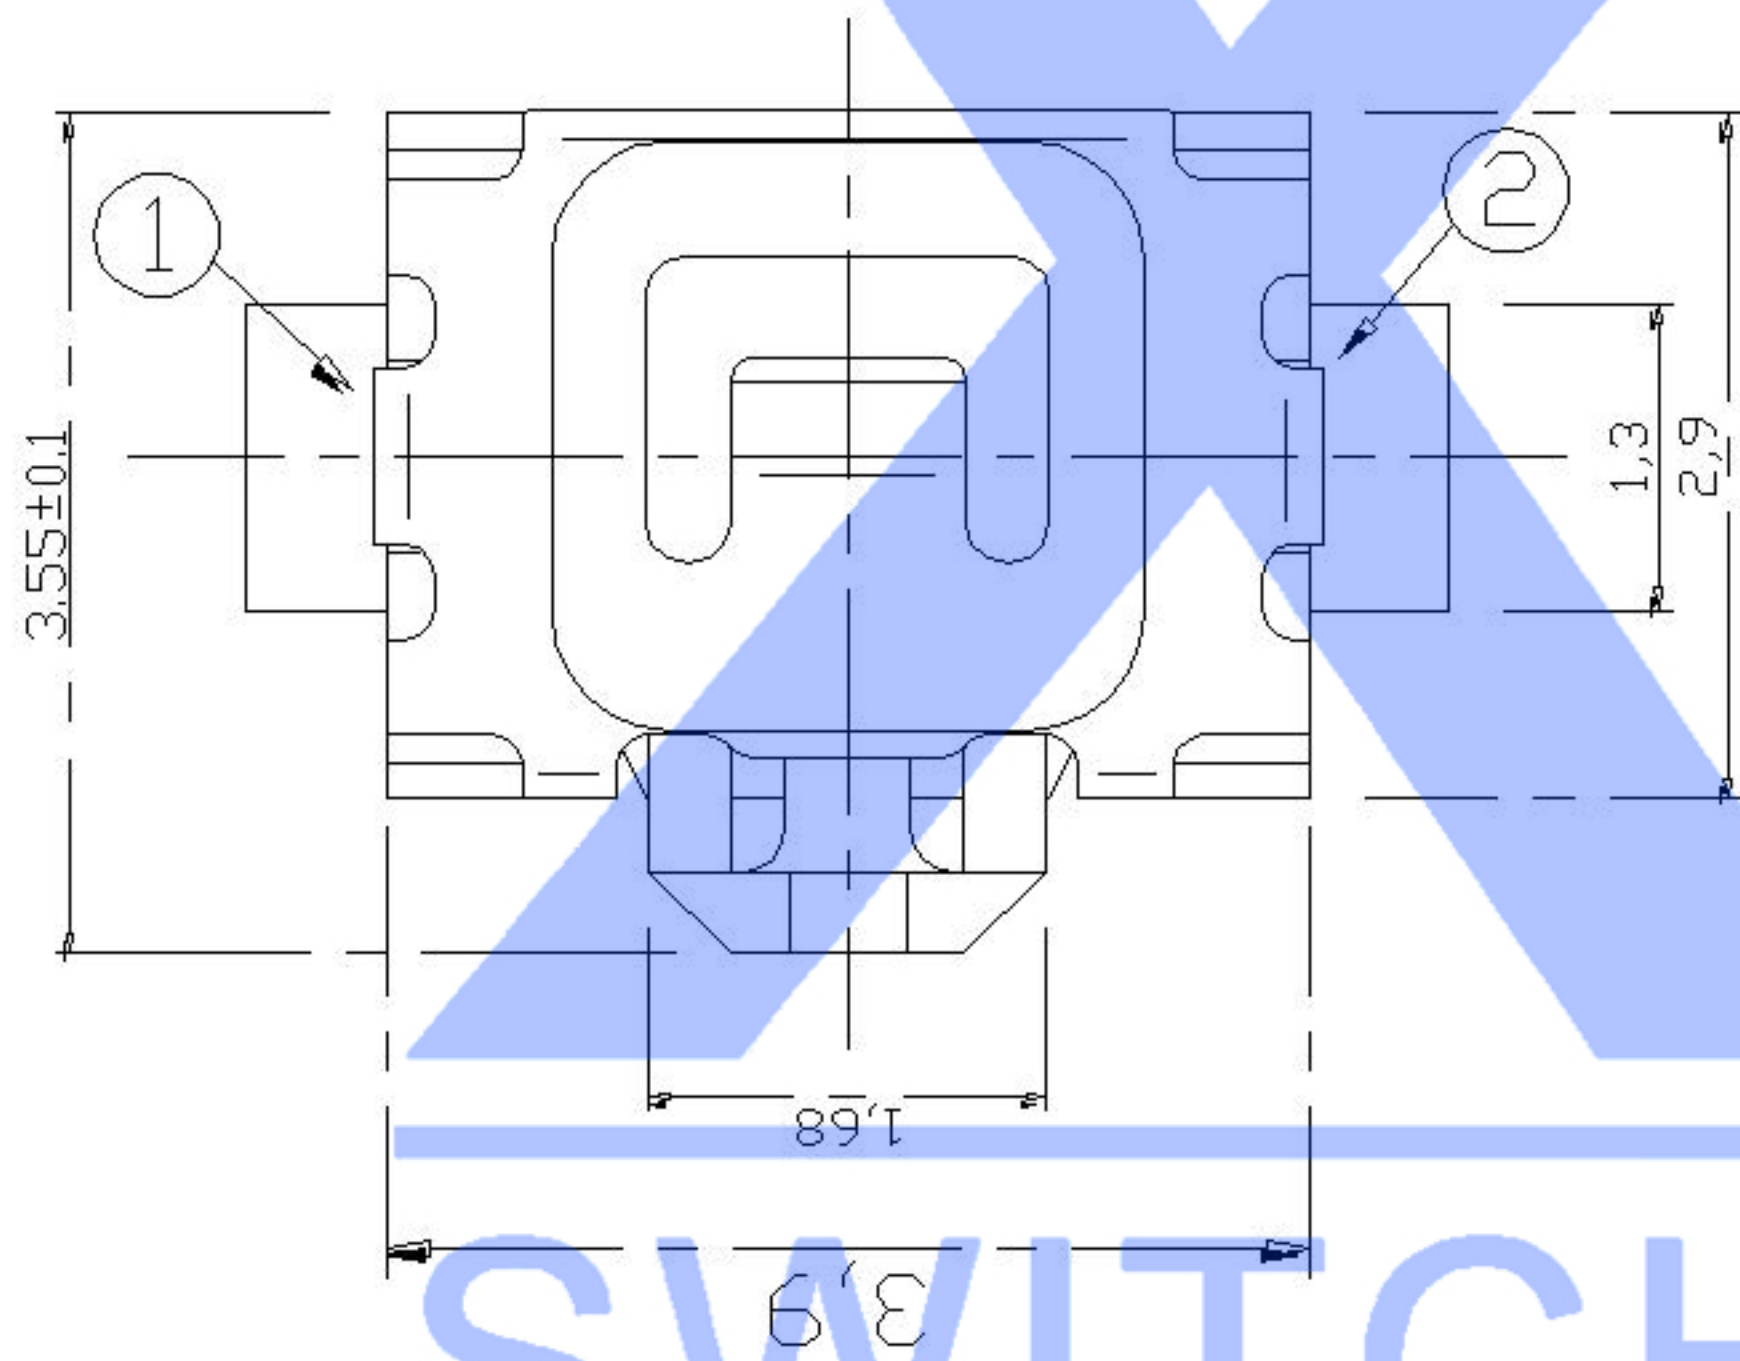


PCB

SWITCH CONNECTOR

**SPECIFICATION**

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.15mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

PAPT NO	TS-1186E-X-X
Operating Force	B: 160gf C: 260gf D: 360gf
Height	II: 3.55
Fixed column	A:With B:without

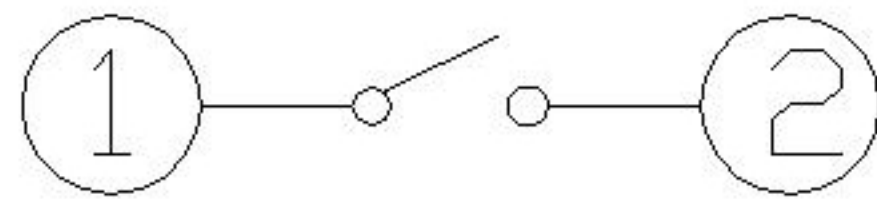

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	PA46		—
②	Cover	—	1	SPCC	Tin plated	—
①	Keystake	—	1	PA46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
						DWN		DATE		VIEW:	PART NO.:		
						CHKD		DATE		UNIT: mm	DWG NO.:		
						APPD		DATE		SIZE: A4	TS-1186E-X-X		
						KKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
											1.0g	1/1	A0

					units: mm
△X					tolerance: X.X ±0.2mm
△X					X.XX ±0.1mm
△X					X.XXX ±0.05mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
REVISIONS					
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					