

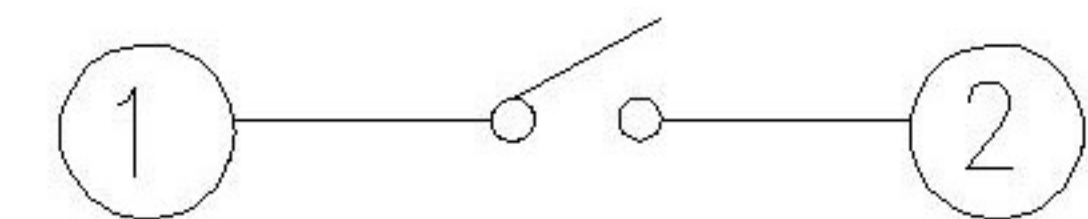


CIRCUIT DIAGRAM

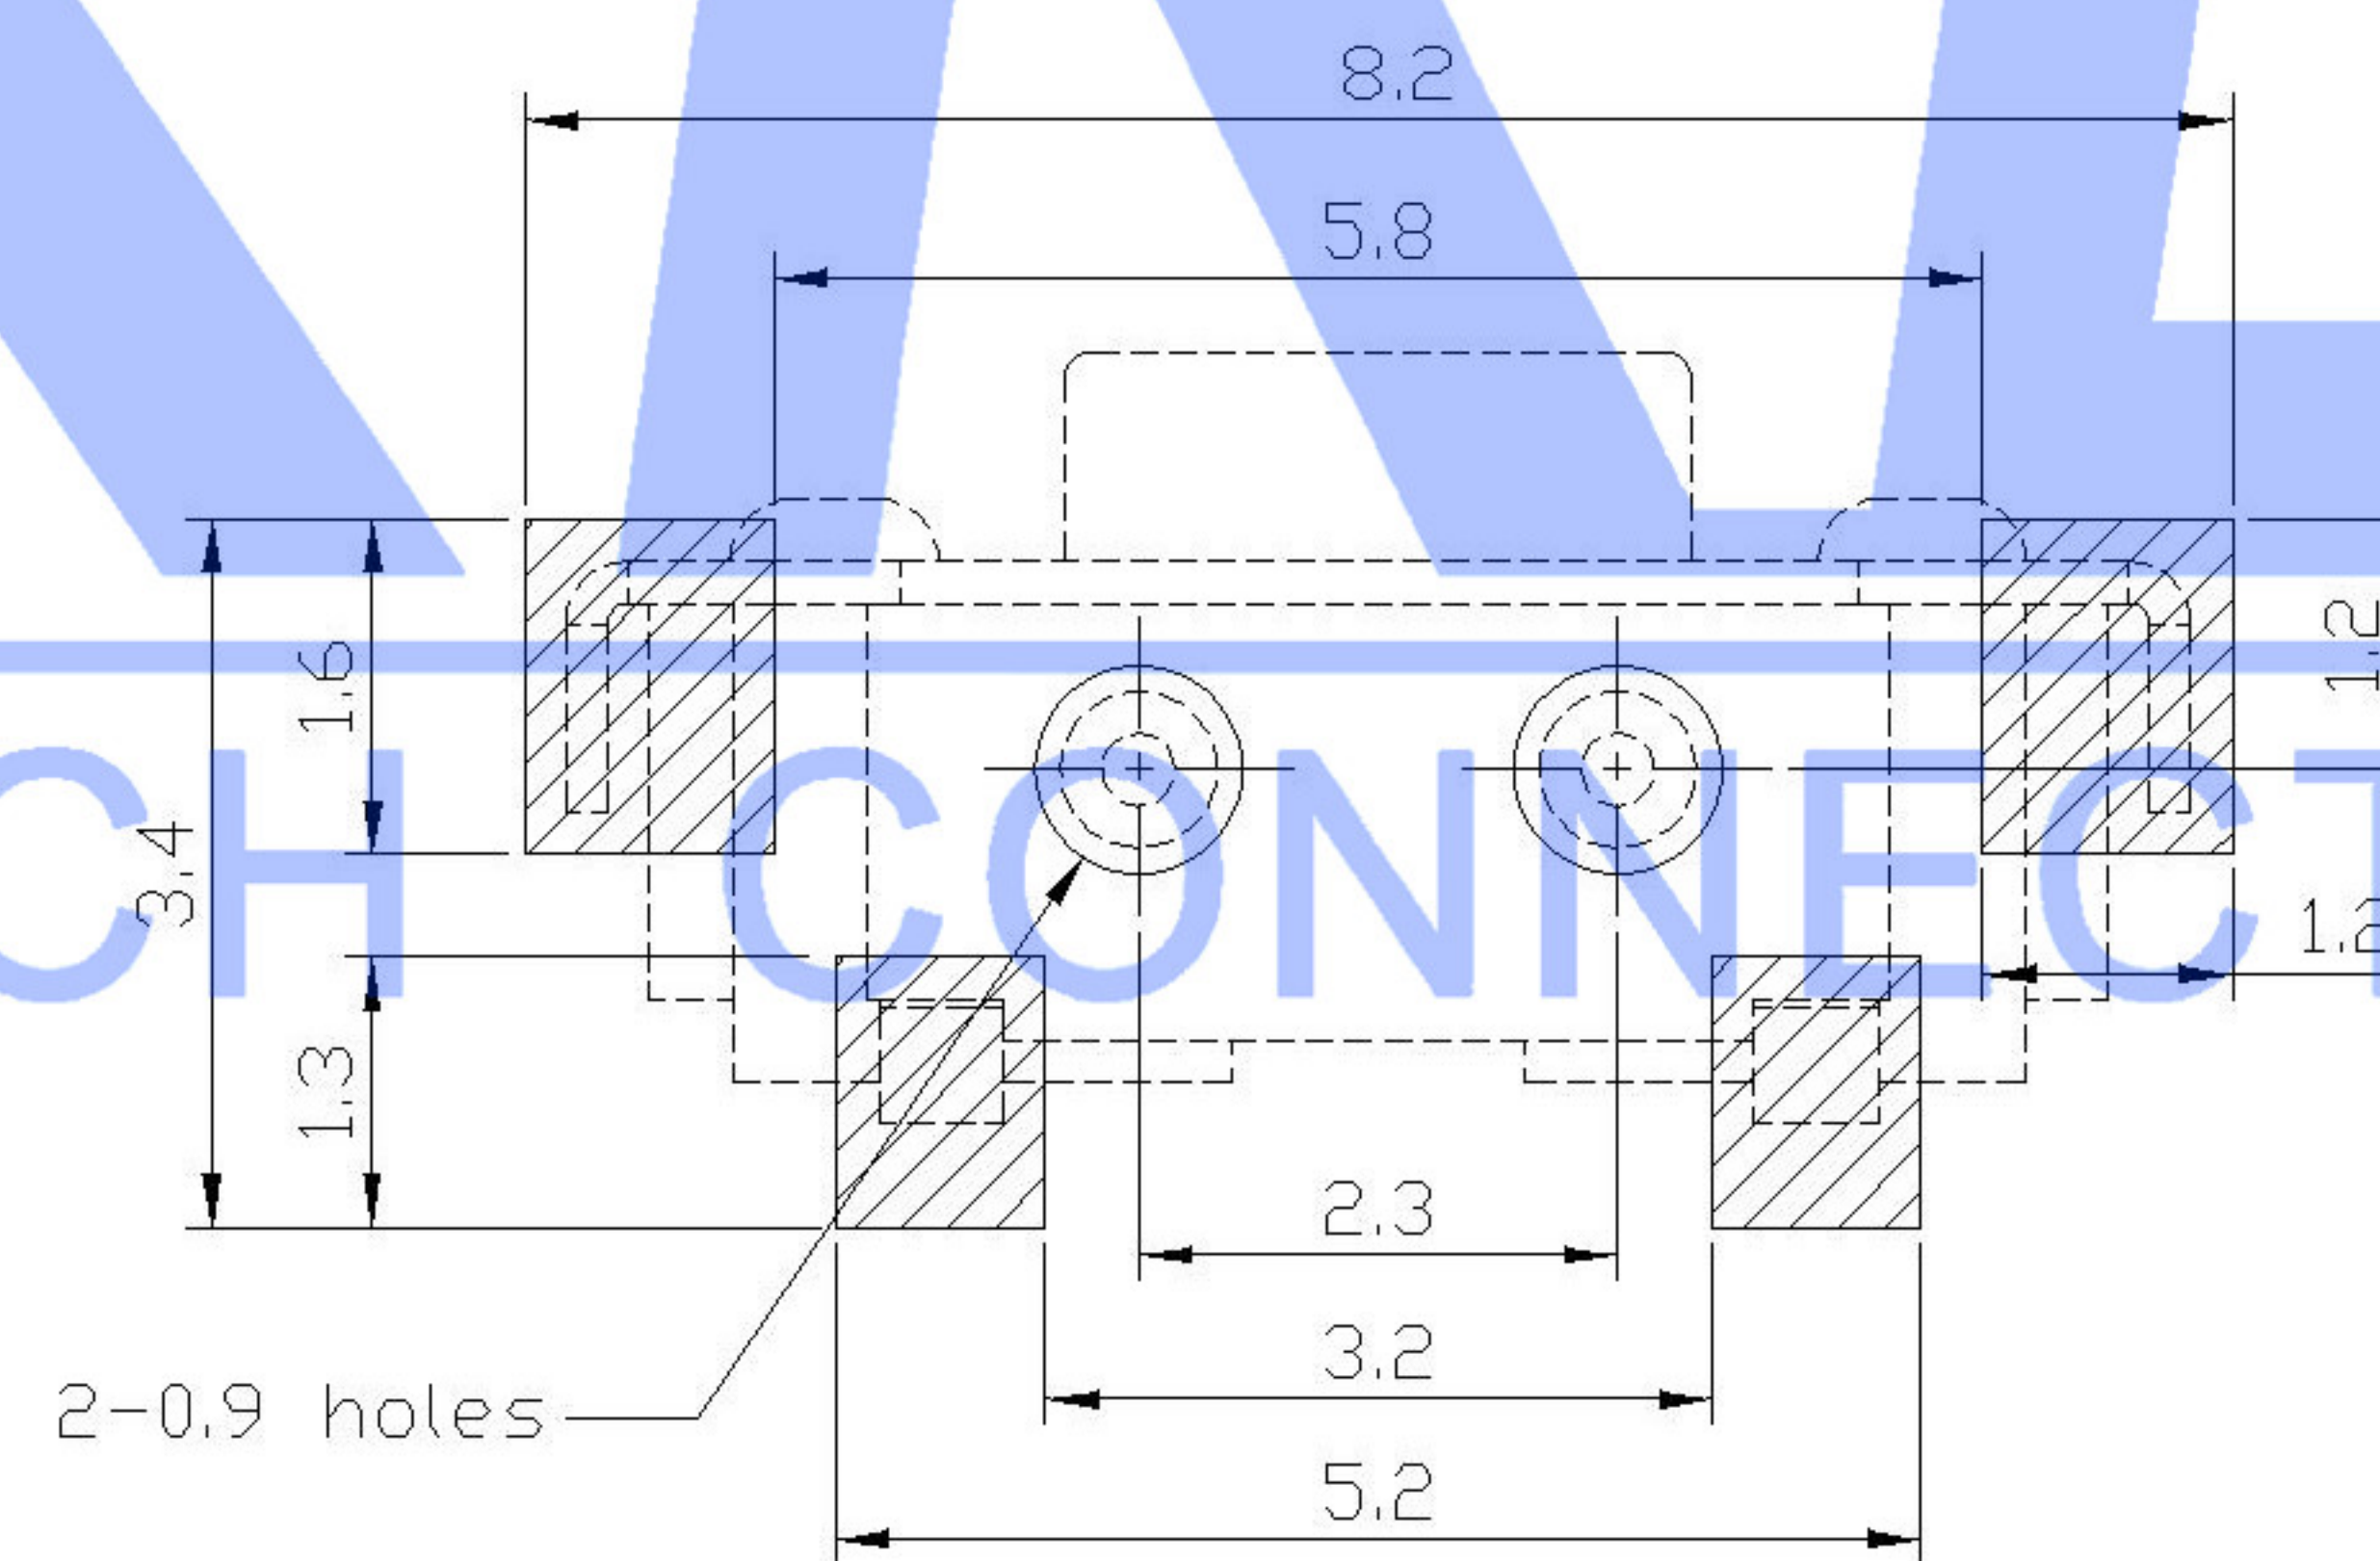


SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

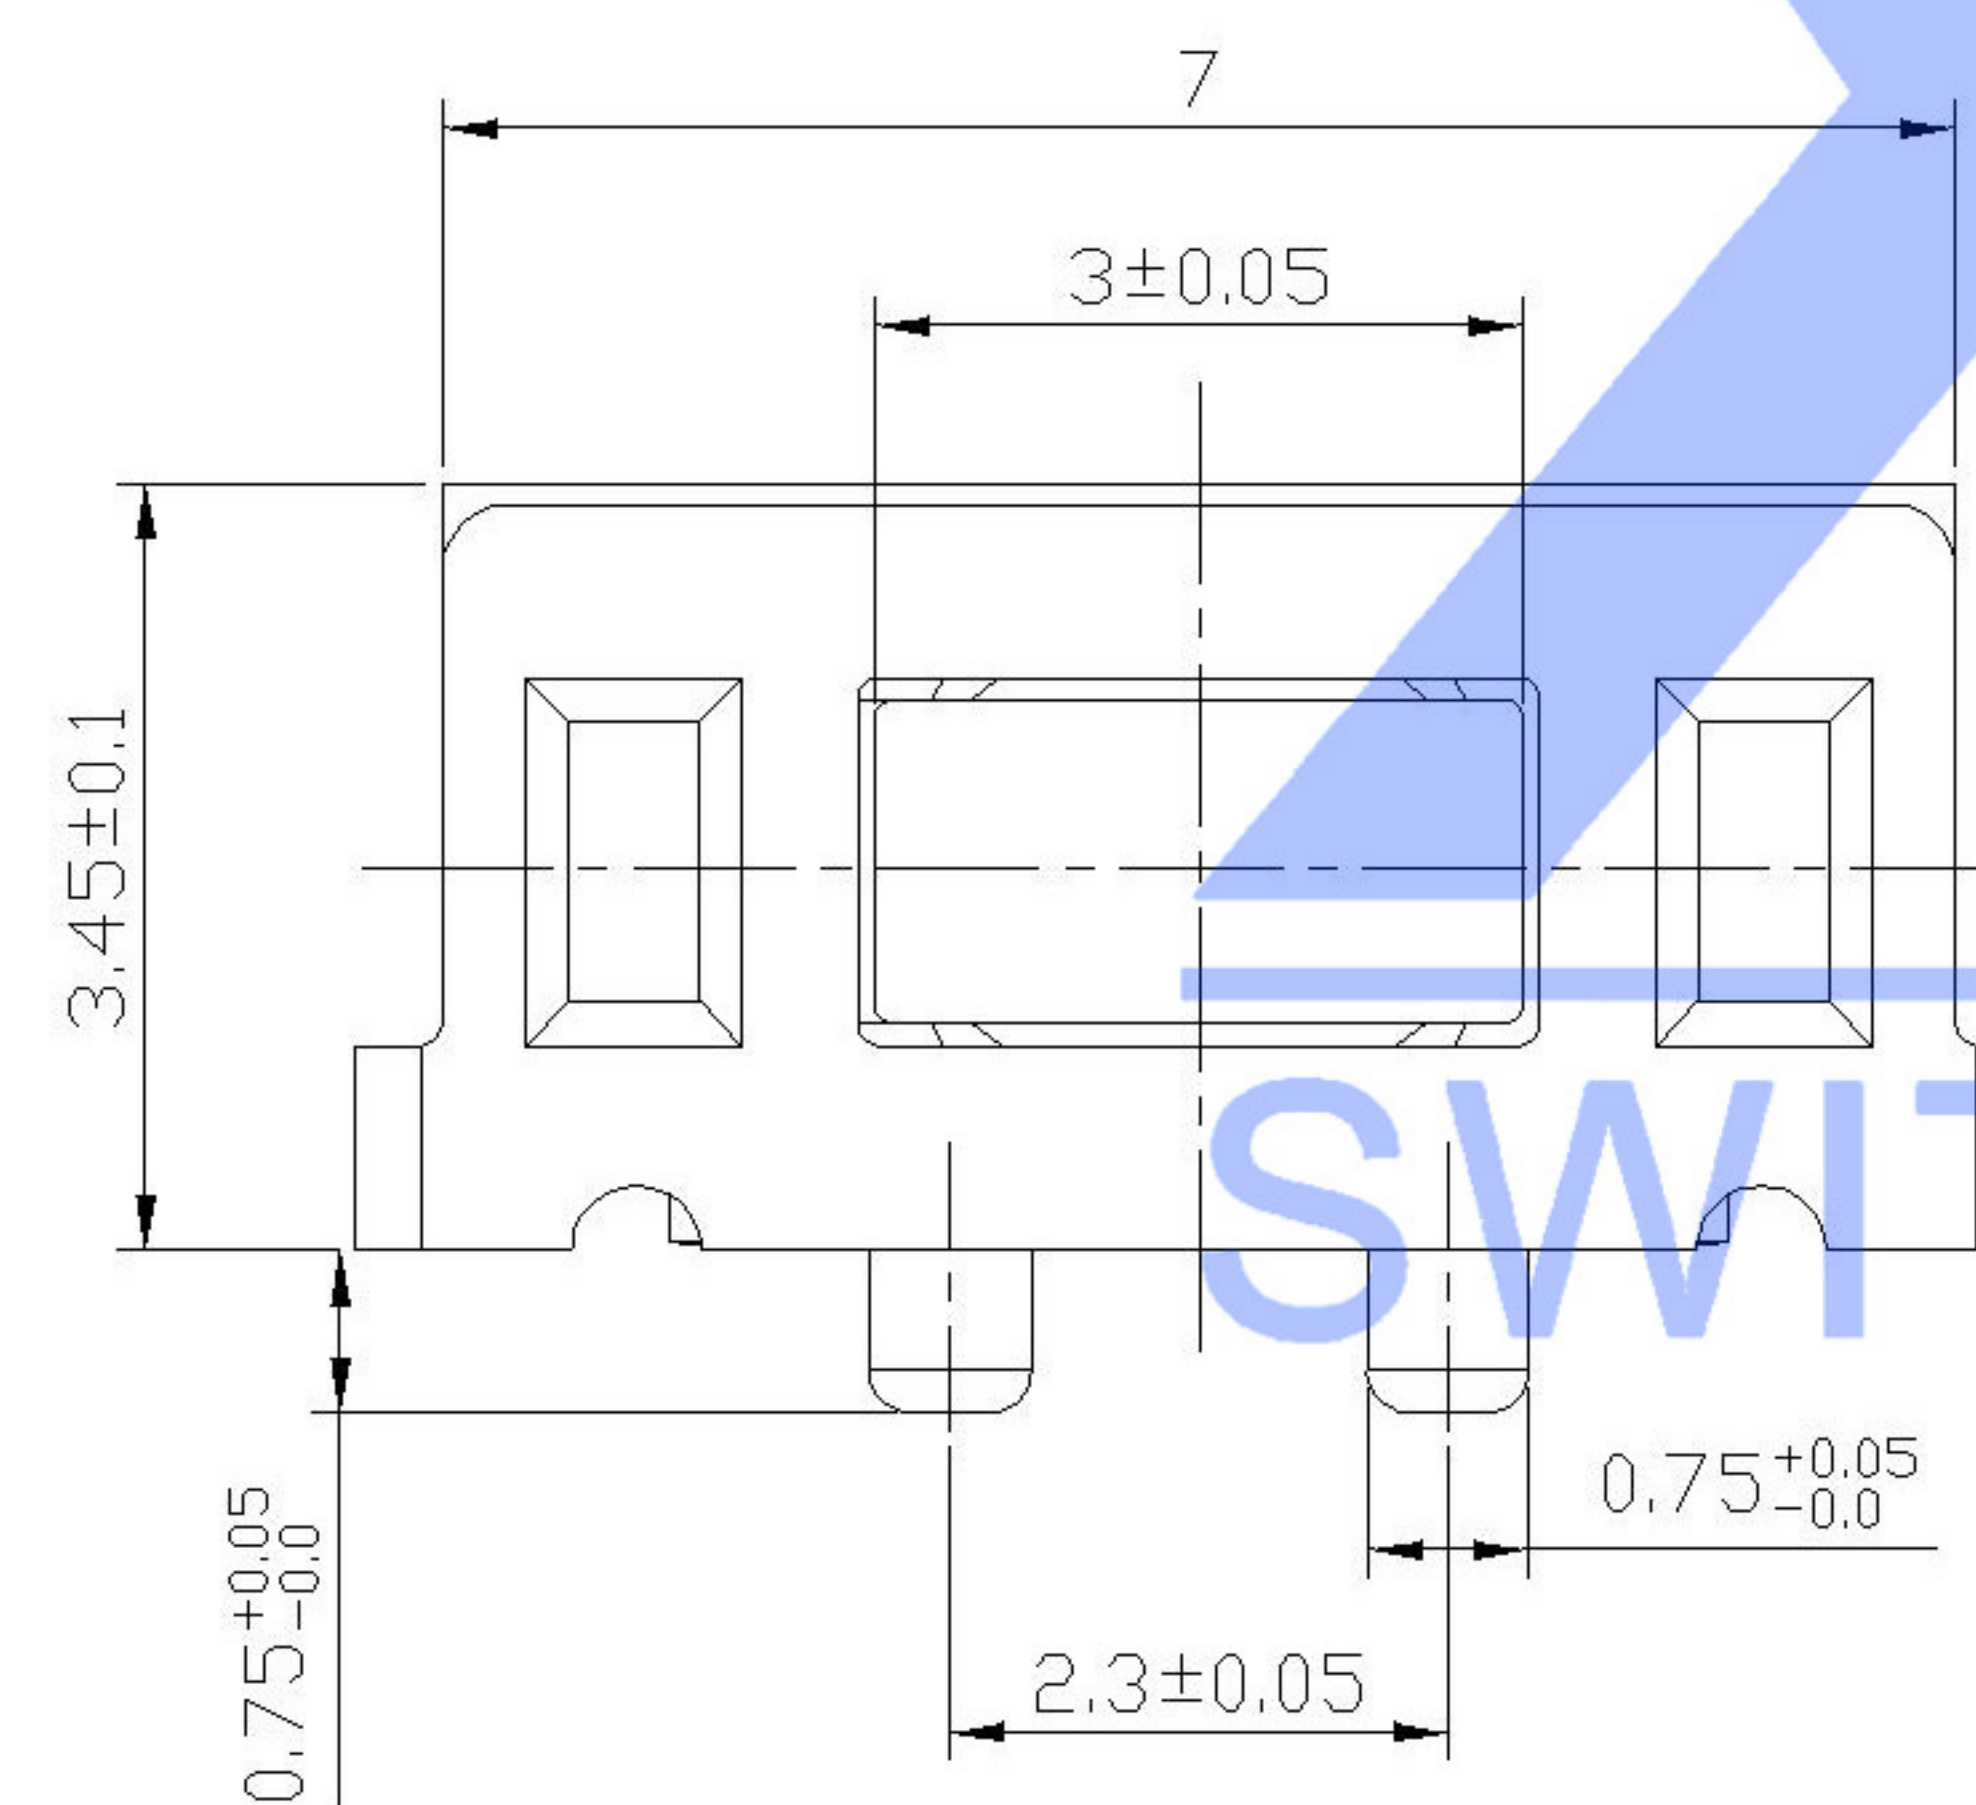

PAPT NO	TS-1101VS-X-X-B
Operating Force	A: 100gf B: 160gf C: 260gf
Height	H: 3.5
Fixed column	A: With B: without
Keystake	A: PA46 B: Silica gel

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	PA46		—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	PA46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm	DWN		DATE		VIEW: 	PART NO.:		
△X					tolerance: X.X ±0.2mm	CHKD		DATE		UNIT: mm	DWG NO.:		
△X					X.XX ±0.1mm	APPD		DATE		SIZE: A4	TS-1101VS-X-X-B		
△X					X.XXX ±0.05mm								
MARK	DESCRIPTION		DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES					XKB INDUSTRIAL PRECISION CO.,LIMITED		
REVISIONS											WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn											1.0g	1/1	A0