

SPECIFICATION


Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

PAPT NO	TS-1105G-X-X-A
Operating Force	A:100gf B:160gf C:260gf
Height	H: 2.5
color	B:black BL:blue
line	A: Normally open B:Normally closed


P.C.B MOUNTING HOLES

SWITCH CONNECTOR

PACKING REEL TYPE 3,000/1 REEL (EA)

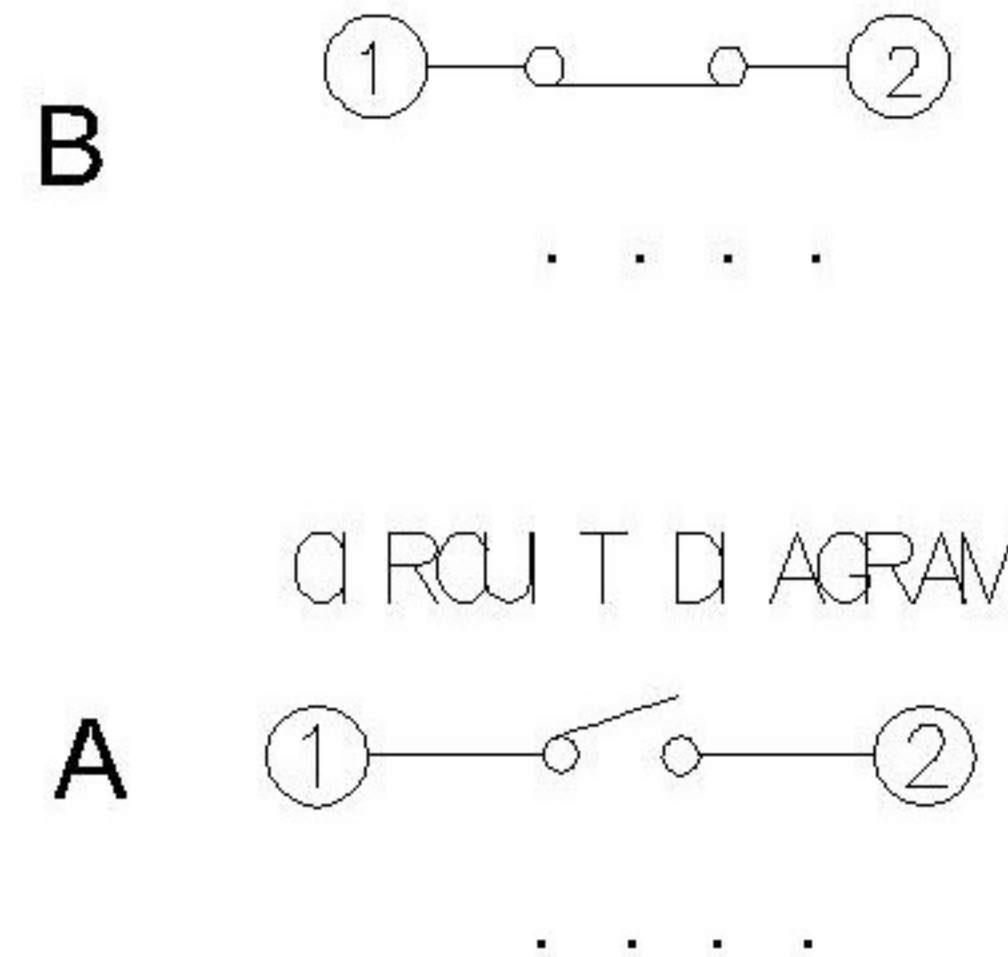

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS	—	—
③	Base	—	1	PA46	—	—
②	Cover	—	1	SUS	Tin plated	—
①	Keystake	—	1	Silica gel	—	—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm	DWN		DATE		VIEW: 	PART NO.:		
△ X					X.X	CHKD		DATE		UNIT: mm	DWG NO.: TS-1105G-X-X-A		
△ X					X.XX								
△ X					X.XXX	APPD		DATE		SIZE: A4	XKB INDUSTRIAL PRECISION CO.,LIMITED		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	±0.1mm								
REVISIONS						UNSPECIFIED TOLERANCES					WEIGHT		
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn											SHEET		
											REVISION		
											1.0g		
											1/1		
											A0		