


Circuit Diagram


PCB Layout(Pattern side)

**NOTE:**  
Rating: DC 12V 50mA  
Operating Force: 200±100gf  
Lifetime: 100,000 Cycles

PAPT NO	L
SK-3270SA-L1	2.0
SK-3270SA-L2	3.0
SK-3270SA-L3	4.0

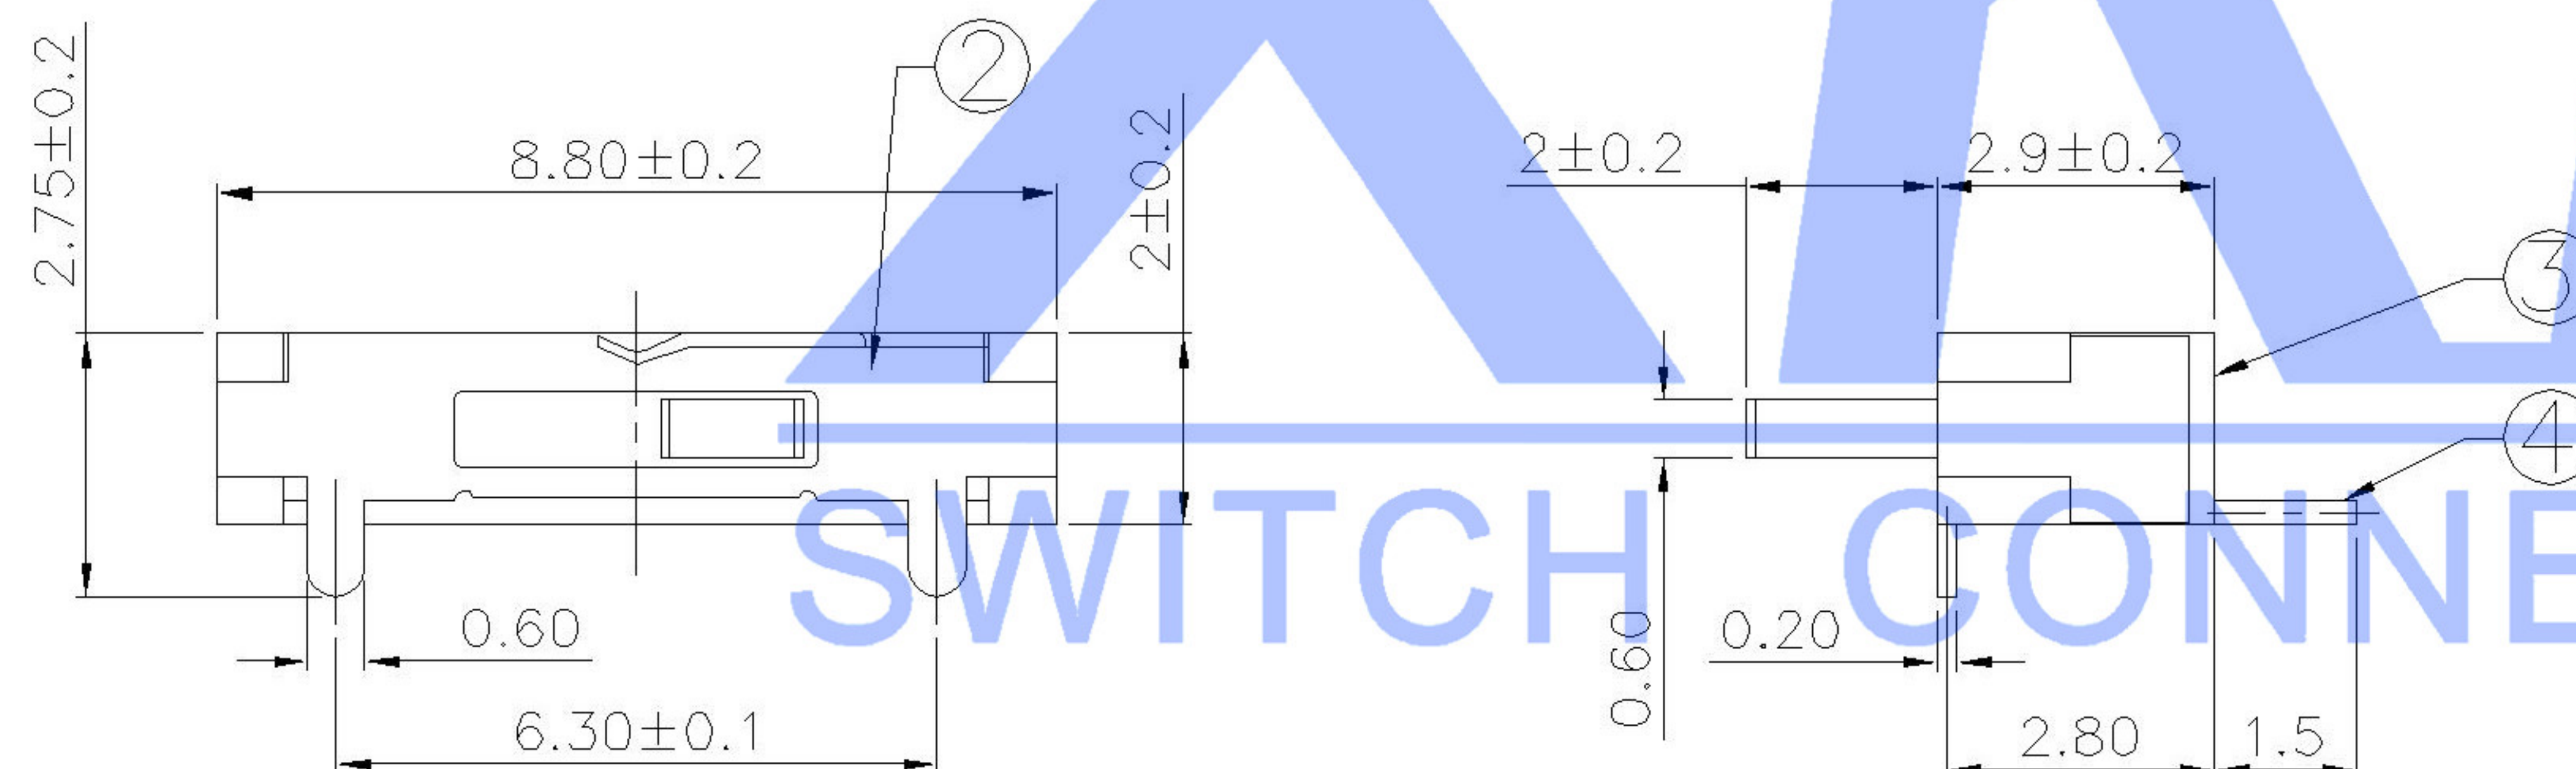

ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	3	Brass (0.30t)	ag Plated	—
④	Contact spring	—	1	Beryllium copper	—	—
③	Base	—	1	LCP	—	—
②	Cover	—	1	SUS	Tin plated	—
①	Keystake	—	1	PA46	—	—

							DSND		DATE		SCALE: N/A	MODEL TYPE: SLIDE SWITCH		
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:		
△ X					L ≤ 4	±0.2	CHKD		DATE		UNIT: mm	DWG NO.:		
△ X					4 < L ≤ 16	±0.3						SK-3270SA-X		
△ X					16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION		DATE	REVISED	APPROVED	L > 63	±0.5							
REVISIONS						UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
www.xk-dg.cn    www.helloxkb.com    www.helloxkb.cn												1.0g	1/1	A0