
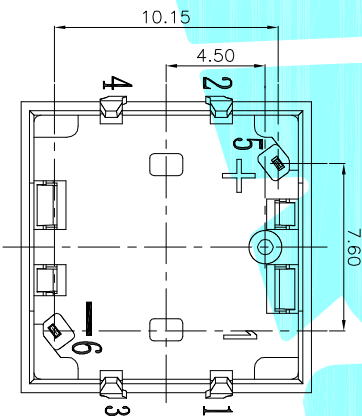
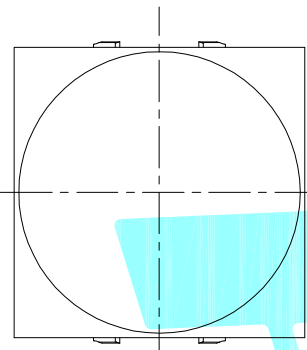
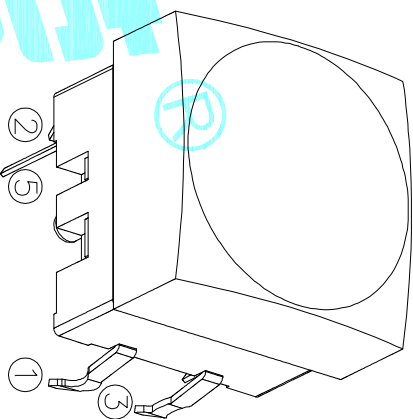
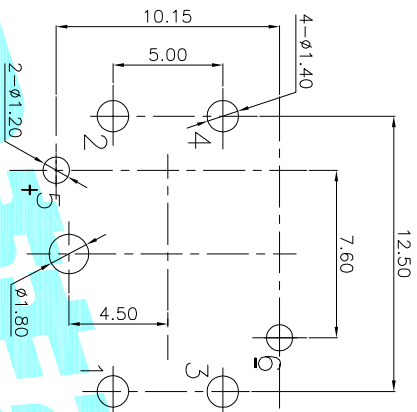
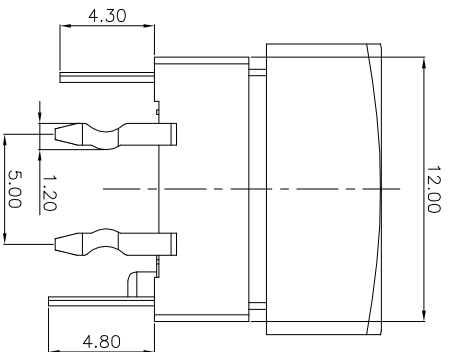


Typical Specifications
1.Rating : DC 30V 0.3A
2.Operating Force : 250 ± 50 gf
3.Contact Resistance : 100mΩMAX
4.Life : 100,000 Cycles Min


②	Terminal	—	4	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	ELECTRONICS CO.,LTD			
DRAWN	J.X.Zhang	2018/08/01				

CHECKED		TITLE:		LED Tact Switch		
APPROVALS		PART NO.		K6-6279D		
TOLERANCES ARE		30~Ø以上 10~30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1
ECN NO.		REV.	DATE.	CHANGE.	CHECK.	APPRO.
NEW		DESCRIPTION.				

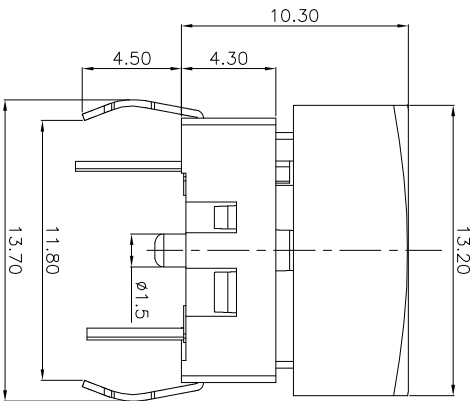

PCB layout(pattern Side)



- Typical Specifications
- 1.Rating : DC 30V 0.3A
 - 2.Operating Force : 250 ± 50 gf
 - 3.Contact Resistance : 100mΩMAX
 - 4.Life : 100,000 Cycles Min

②	Terminal	—	4	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	ELECTRONICS CO.,LTD			
DRAWN	J.X.Zhang	2018/08/01				

CHECKED		TITLE:		LED Tact Switch		
APPROVALS		PART NO.		K6-6278D		
TOLERANCES ARE		30~0.15	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			PROJ: ①
		5~10	±0.15			SHEET 1 OF 1
		~ 5	±0.10	±2°	DRAWING NO.	
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			