


P.C.B LAYOUT(copper-sided view)

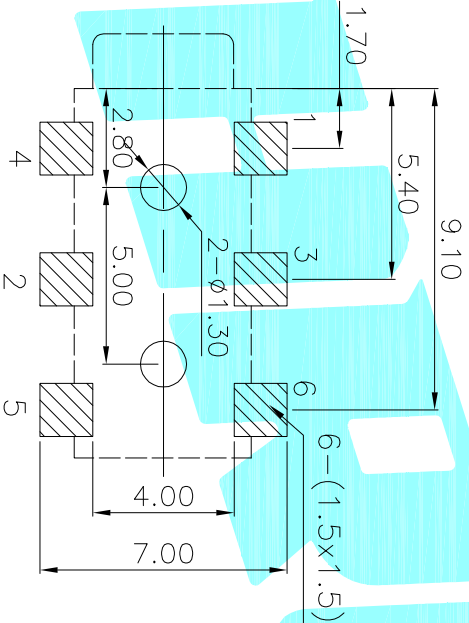

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:−20℃~70℃
Operating force:3~20N
Operating Life:5,000cycles

Model No.	PJ-237-A	PJ-237-B
Schematic		
Model No.	PJ-237-C	PJ-237-D
Schematic		


Rating: 0.5A 30V DC


Contact Resistance: 100 mΩ Max.

Operating temperature: -20℃ ~ 70℃

Operating force: 3~20N

Operating Life: 5,000 cycles

②	Terminal	—	6	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER. NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		 HERO ELECTRONICS CO., LTD		
DRAWN	JKUN.LU	2013/11/11				
CHECKED		TITLE: PHONE JACKS				
APPROVALS				PART NO. PU-237		

TOLERANCES ARE	30%以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ. 
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10	±2°	DRAWING NO.		SHEET 1 of 1