




P.C.B Layout (copper-sided view)

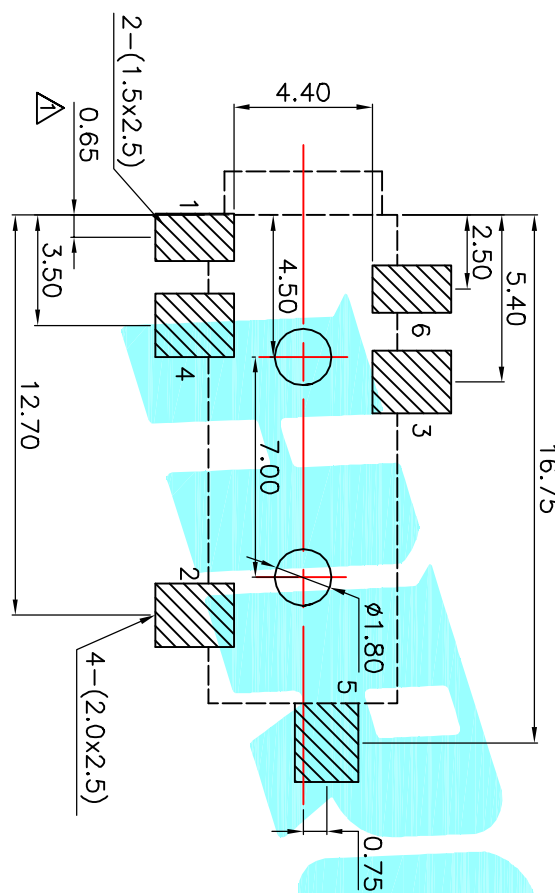

Model NO	PJ-328B-A	PJ-328B-B	PJ-328B-C
Schematic			
Model NO	PJ-328B-D	PJ-328B-E	PJ-328B-F
Schematic			
Schematic			

Rating:0.5A 30V DC  
Contact Resistance:100 mΩ Max.  
Operating temperature:-20℃~70℃  
Operating force:3~20N  
Operating Life:5,000cycles

						CHECKED	TITLE:	PHONE JACKS
B	—	$\Delta$	APPROVALS		PART NO.	PJ-328B		
A	—							
REV.	DATE.							
ECON NO.		NEW			UNIT: mm	SCALE: 1:1	PROL	
		DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE		
						30 $\pm$ 0.1 10 $\pm$ 0.05 5 $\pm$ 0.025	ANGLE	
						±2°	DRAWING NO.	SHEET 1 OF 1