


P.C.B LAYOUT(copper-sided view)

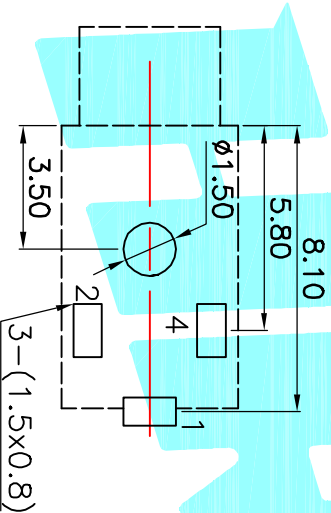

Model NO	A=φ4	PJ-2100
	A=φ5	PJ-2100A
Schematic		

Rating:0.5A 30V DC  
Contact Resistance:100 mΩ Max.  
Operating temperature:-20℃~70℃  
Operating force:3-20N  
Operating Life:5,000cycles

②	Terminal	—	3	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TERNO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		ELECTRONICS CO.,LTD		
DRAWN		J.X.Zhang		2013/11/11		TITLE: PHONE JACKES
CHECKED						PJ-2100
APPROVALS						SCALE: 1:1
TOLERANCES ARE		30 <sup>±0.1</sup>	±0.30	ANGLE	UNIT: mm	PROJ
		10 <sup>±0.10</sup>	±0.20			
		5 <sup>±0.10</sup>	±0.15	±2°	DRAWING NO.	SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			