



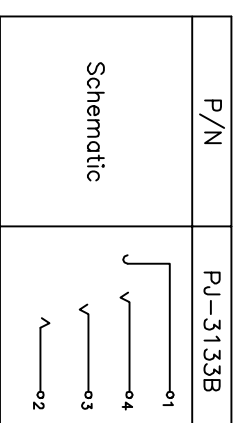

### P.C.B Layout (copper-sided view)

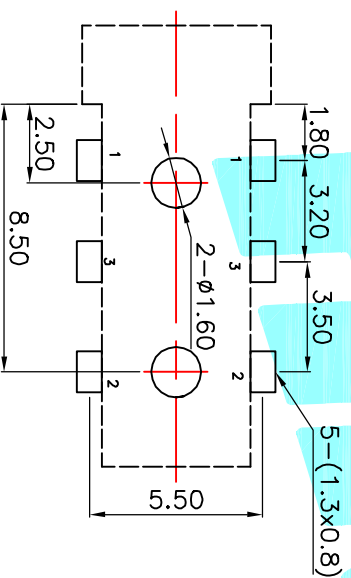

Rating:0.5A 30V DC  
Contact Resistance:100 mΩ Max.  
Operating temperature:-20℃~70℃  
Operating force:3~20N  
Operating Life:5,000cycles

Contact Resistance:100 mΩ max. Operating temperature:-20℃~70℃ Operating force:3-20N Operating Life:5,000cycles									
②	Terminal	—	6	Phosphor bronze	Au Plating	—			
①	Housing	—	1	Nylon	Black	—			
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK			
APPROVALS		DATE		 ELECTRONICS CO.,LTD					
DRAWN	J.X.Zhang	2013/11/11							
CHECKED									
APPROVALS				PART NO.	PJ-3133B				
TOLERANCES ARE									
30~100		±0.30		ANGLE					
10~30		±0.20							
5~10		±0.15		±2°					
~ 5		±0.10							
DRAWING NO.				SCALE: 1:1		PROJ. 			
SHEET 1 of 1									
