



P.C.B LAYOUT(copper-sided view)

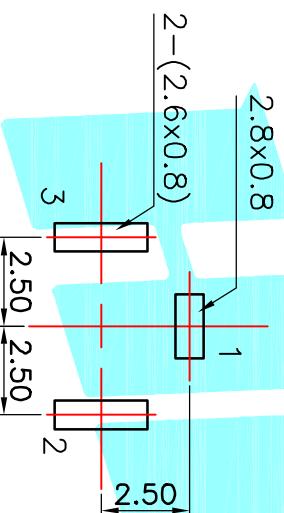

| | |
|-----------|---------|
| Model No. | PJ-3920 |
| Schematic | |

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:−20℃~70℃
Operating force:3~20N
Operating Life:5,000cycles

| | | | | | | |
|------|-----------|---------|------|-----------------|------------|--------|
| ② | Terminal | — | 3 | Phosphor bronze | Au Plating | — |
| ① | Housing | — | 1 | Nylon | Black | — |
| ITEM | PART NAME | TER NO. | QTY. | MATERIAL | FINISHING | REMARK |

| | | |
|-----------|-----------|---|
| APPROVALS | |  |
| | DATE | |
| DRAWN | J.X.Zhang | 2013/11/11 |

ELECTRONICS CO.,LTD

| | | |
|-----------|--|---------------------|
| | | |
| CHECKED | | TITLE: PHONE JACKES |
| APPROVALS | | PART NO. PJ-3920 |

[illegible]