



P.C.B LAYOUT(Copper-side view)

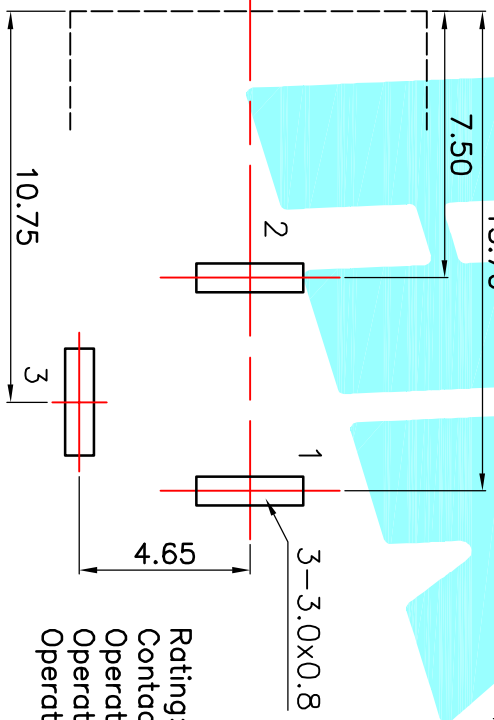

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3~20N
Operating Life:5,000cycles

Model No.	1	2	3
PIN	$\phi 2.0$	$\phi 2.35$	$\phi 2.5$

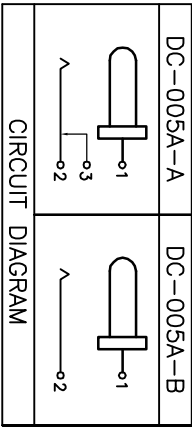

ECN NO.		REV.		DATE		DESCRIPTION		CHANGE		CHECK		APPRO.	
NEW		NEW		NEW		NEW		NEW		NEW		NEW	
A		A		A		A		A		A		A	
J.X.Zhang		2013/11/11		TITLE:		ELECTRONICS CO.,LTD		PART NO.		DC-005A		PROJ. SHEET 1 OF 1	
DRAWN		J.X.Zhang		2013/11/11		TITLE:		PHONE JACKS		DC-005A		PROJ. SHEET 1 OF 1	
CHECKED				DATE		TITLE:		PHONE JACKS		DC-005A		PROJ. SHEET 1 OF 1	
APPROVALS				DATE		TITLE:		PHONE JACKS		DC-005A		PROJ. SHEET 1 OF 1	
TOLERANCES ARE		30~0.1		±0.30		ANGLE		UNIT: mm		SCALE: 1:1		PROJ. SHEET 1 OF 1	
10~0.30		±0.20		±0.15		±2°		DRAWING NO.		SHEET 1 OF 1		SHEET 1 OF 1	
5~0.10		±0.15		±2°		DRAWING NO.		SHEET 1 OF 1		SHEET 1 OF 1		SHEET 1 OF 1	
~ 5		±0.10		±2°		DRAWING NO.		SHEET 1 OF 1		SHEET 1 OF 1		SHEET 1 OF 1	