


规格说明: Specifications:

电气特性: Electrical:


1. 额定电流: Current Rating  
1.5A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触电阻: Contact Resistance  
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:  
1000MEGA ohms MIN

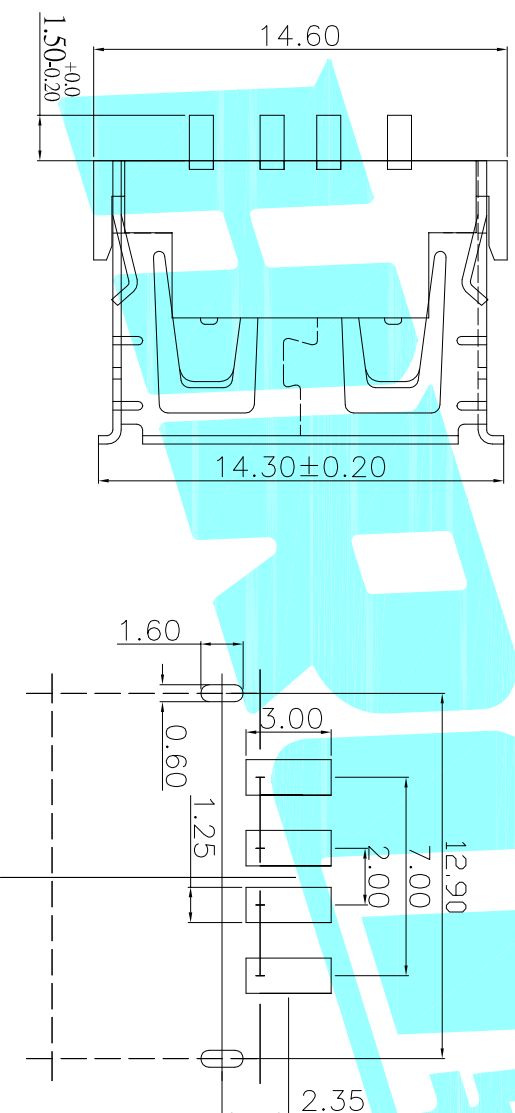

## Recommended PCB Layout

PART NO	H
U-A-24DD-Y-11	6.30
U-A-24DD-Y-12	6.80

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Bose	—	1	NYLON		—
②	Terminal	—	4	Phosphor Bronze	Ag Plated	—
①	Housing	—	1	SPCC	Sn Plated	—

APPROVALS		DATE	 ELECTRONICS CO., LTD
DRAWN	xu qi feng	2018/8/1	

						TITLE: USB CONNECTOR	
				CHECKED			
				APPROVALS			
				PART NO.			
				SCALE: 1:1		<div> <div>PROJ. </div> <div>SHEET 1 OF 1</div> </div>	
				TOLERANCES ARE			
				30~以上	±0.30	ANGLE	
				10~30	±0.25		
				5~10	±0.20	UNIT: mm	
				~ 5	±0.15	DRAWING NO.	
CON NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	
	A		NEW				