
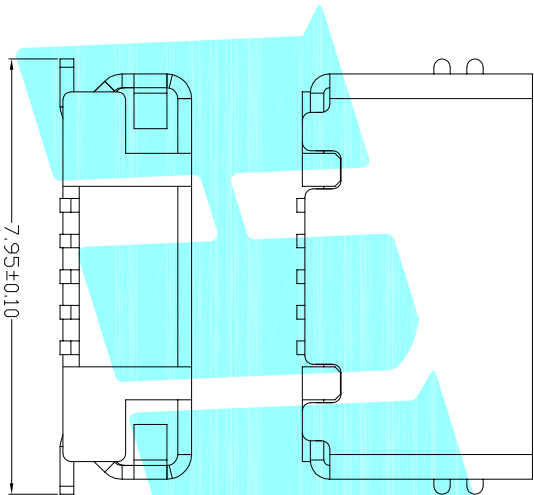


PCB LAYOUT

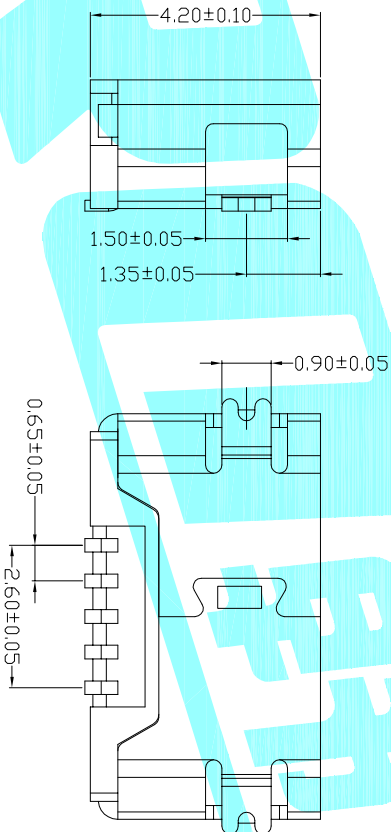

备注:

1. 产品规格:

1-1. 插入力: 35N MAX.

1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER 10000 CYCLES

1-3. 额定电流: 1.0A

1-4. 额定电压: 30V

1-5. 耐久性: 10000 CYCLES MIN.

1-6. 耐电压: 100V AC MIN.

1-7. 接触阻抗: 30mΩ MAX. INITIAL: 40mΩ MAX AFTER 10000 CYCLES

1-8. 绝缘电阻: 100MΩ MIN

1-9. 工作温度: -30° TO +80°

2. 材质:

2. 1胶芯: LCP UL94V-0

2. 2端子: C2680R-H, 镍底, 镀金1μ"

2. 3外壳: C2680R-H, 表面镀镍100μ

3. 所用材质须符合RoHS要求

4. 重点尺寸标识"▲"符号

③	Shell	—	1	Phosphor Bronze	Sn Plated	—
②	Contact	—	5	Phosphor Bronze	Au Plated	—
①	Housing	—	1	LCP	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	HILPOE ELECTRONICS CO.,LTD			
DRAWN	JKUN.LU	2015/3/29				

CHECKED		TITLE: USB CONNECTOR				
APPROVALS		PART NO.	U-F-M5SW-W-1			
TOLERANCES ARE		30~0.15	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
ECN NO.		REV.	NEW	DESCRIPTION.	CHANGE.	CHECK.
A		—	—	—	—	—
DATE.		—	—	—	—	—
APPRO.		—	—	—	—	—
SHEET		1	OF	1		