


SCHMATIC



SPECIFICATIONS :
 RATING : 1A 250VAC, 3A 120VAC or 28VDC
 CONTACT RESISTANCE: $R=20m\Omega$ Max , $Q=50m\Omega$ Max
 ELECTRICAL LIFE : 6,000 cycles
 INSULATION RESISTANCE : $1000M\Omega$ min, 1000VDC
 DIELECTRIC STRENGTH : 1000VAC for 1 Minute
 OPERATING TEMPERATURE : $-30^{\circ}C \sim 85^{\circ}C$
 FULL TRAVEL : 1.85 ± 0.35 mm
 OPERATING TRAVEL : 1.45 ± 0.30 mm
 OPERATING FORCE : $200 \pm 50g$
 TERMINALS: SOLDER or PC

MATERIALS :
 PLUNGER : NYLON GLASS FIBER
 BUSHING : BRASS, NICKEL PLATED
 HOUSING : STAINLESS
 SPRING : PIANO WIRE
 CONTACT/TERMINALS : SILVER PLATED

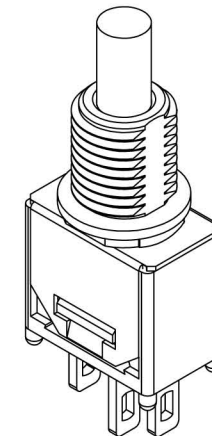

TACLEX ELECTRONICS CO.,LTD.

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例): 3:2	TITLE 圖名	PUSH SWITCH, LATCHING	SIZE 圖紙	A4
1	Ⓐ				TOLERANCE (公差): 0.00 mm \pm 0.25mm 0.0 mm \pm 0.40mm ANGULAR : $\pm 2^{\circ}$ FILE NAME : 8MSL0002	DWG NO. 圖號	8MSLP1B61M1QES	UNIT 單位	inch mm
2	Ⓑ					REV. 版本	A	DATE 日期	SEP - 21 - 2009
3	Ⓒ					CHECKED BY 審核	RICHARD	DRAWN BY 製圖	王柏堅
4	Ⓓ								
5	Ⓔ								
								SHEET 張數	1 of 1