


Sealed Ultraminiature Pushbutton Switches **8U SERIES**

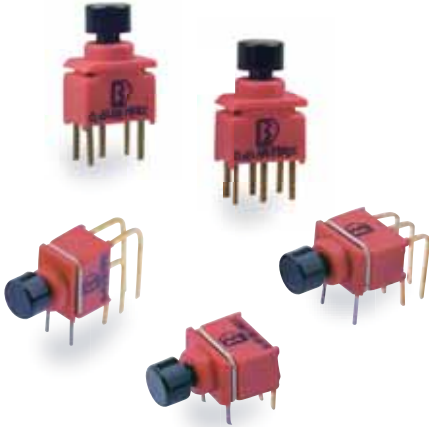

SPECIFICATIONS

CONTACT RATING: 0.4 VA max. @ 20 V AC or DC max.

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: Below 100mΩ typ. initial @ 2-4VDC, 100mA.

INSULATION RESISTANCE: 500MΩ min.

DIELECTRIC STRENGTH: 500 V RMS@sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS


HOUSING AND BASE: Glass filled nylon 6/6 or 4/6 , flame retardant ,heat stabilized(UL94V-0)

ACTUATOR: Glass filled nylon 6/6 , flame retardant, heat stabilized (UL94V-0), with standard internal o-ring seal.





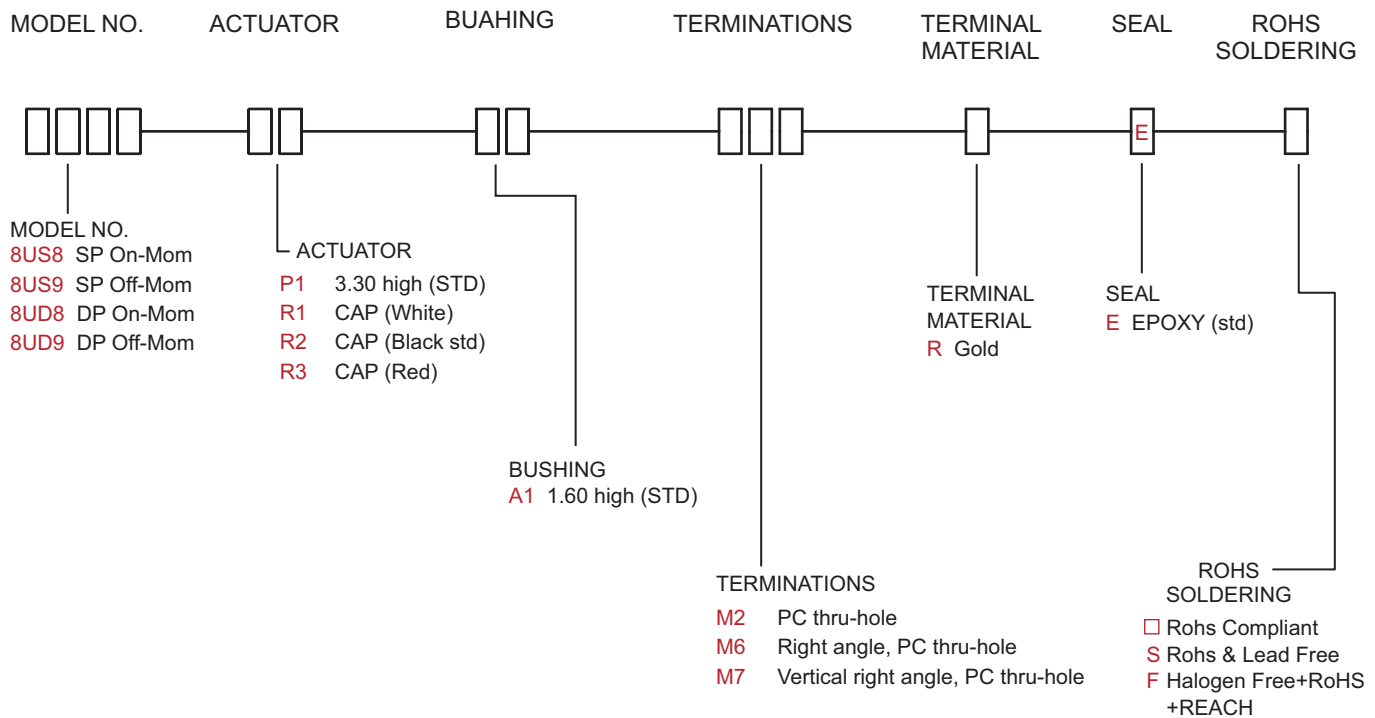







SWITCH SUPPORT: Steel, whit nickel plate.

CONTACTS/TERMINALS: Slive plate plated copper alloy.

HOW TO ORDER




SWITCH FUNCTION

NO. POLES	MODEL NO.	SWITCH FUNCTION		CONNECTED TERMINALS / SCHEMATIC	
		POS.1	POS.2	POS.1	POS.2
					
SP	8US8	ON	MOM	5-6 	5-4 
	8US9	OFF	MOM	OPEN 	4-6 
DP	8UD8	ON	MOM	2-3,5-6 	2-1,5-4 
	8UD9	OFF	MOM	OPEN 	1-3,4-6 


MOM=MOMENTARY

M2

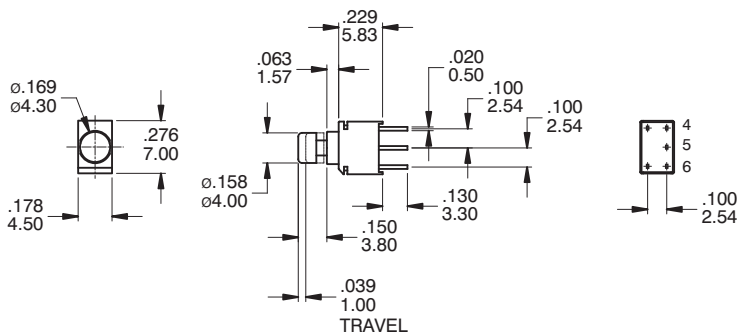


Part No. Shown : 8US8R2A1M2RE

P.C. MOUNTING




SPDT

M2

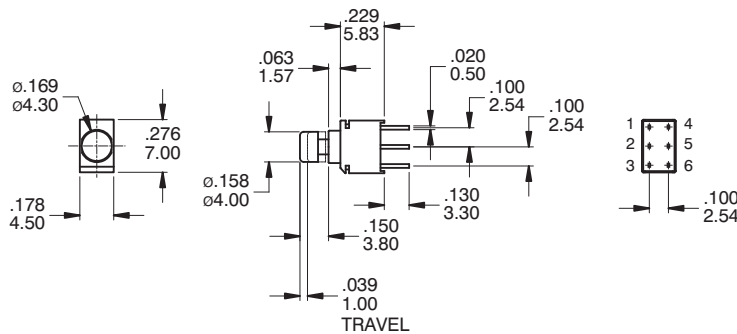


Part No. Shown : 8UD8R2A1M2RE

P.C. MOUNTING




DPDT

M6

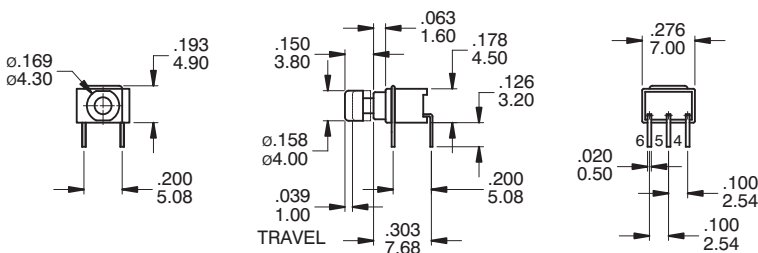

Part No. Shown : 8US8R2A1M6RE





P.C. MOUNTING




SPDT

Sealed Ultraminiature Pushbutton Switches **8U SERIES**

M6







P.C. MOUNTING




DPDT

Part No. Shown : 8UD8R2A1M6RE

M7







P.C. MOUNTING




SPDT

Part No. Shown : 8US8R2A1M7RE

M7



P.C. MOUNTING



DPDT

Part No. Shown : 8UD8R2A1M7RE



IP 67
 ACCORDING TO
 EN 60529:1991+A1:2001
 IEC 60529:2001

SOLDERING PROCESSES

WAVE SOLDERING : Recommended Soldering Temperature : $260 \pm 5^{\circ}\text{C}$
 Duration of Solder Immersion : 5 ± 1 seconds
 (PCB is 1.6mm in thickness)

SOLDERING : Vapor phase

Temperature Profile

Zone	Room Temperature	Time (Sec)
Pre-heat (A)	150°C	Min 120s
Soak (B)	$180^{\circ}\text{C} \sim 200^{\circ}\text{C}$	Min 150s
Peak (C)	$200^{\circ}\text{C} \sim 235^{\circ}\text{C}$	Min 30s
Peak (D)	$235^{\circ}\text{C} \sim 260^{\circ}\text{C}$	Min 40s
Peak (E)	260°C	Min 10s

