
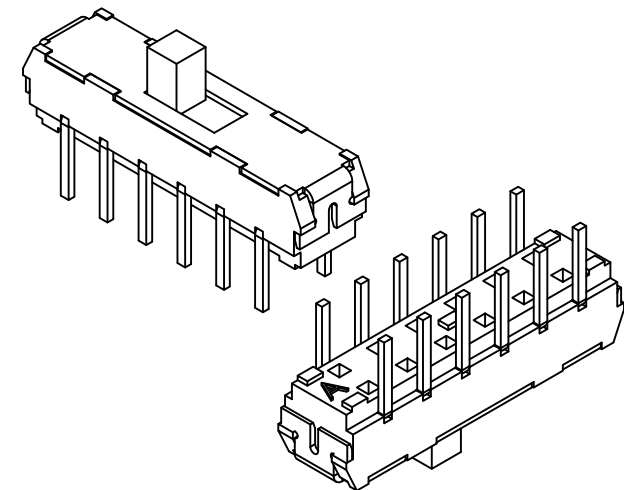



NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	FRAME	PA+G	1	
2	COVER	SUS301	1	
3	SLIDER	PA+G	1	
4	TERMINAL	BSR2	12	Ag PLATED
5	CONTACT PLATE	PBS	4	Ag PLATED

CIRCUIT DIAGRAM



- SPECIFICATIONS:
- 1.RATING: 6VDC. 0.3A.
  - 2.CONTACT RESISTANCE: 70mΩ MAX.
  - 3.INSULATION RESISTANCE: 500VDC-100MΩ MIN.
  - 4.WITHSTAND VOLTAGE: 500VAC-1 MINUTE
  - 5.OPERATING FORCE: 200±150gf
  - 6.CIRCUIT: 4 POLE 2 THROW
  - 7.STROKE: 2.0±0.3mm
  - 8.LIFE CYCLE: 10,000 CYCLES

P.C.B. LAYOUT

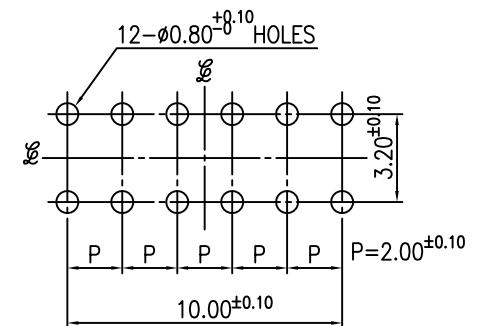

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



**TACLEX**

*TACLEX ELECTRONICS CO., LTD.*

TOLERANCES UNLESS  
OTHERWISE SPECIFIED  
LINEAR: ±0.30 ANGULAR: ±3°

REVISIONS  
A



SCALE  
5/1

SIGNATURES

DATE

TITLE

DRAWN **James**

2007.06.15

SLIDE SWITCH

CHK'D **Andy**





2007.06.15

NO.

APPV'D **Rex**


2007.06.15

SSA-100

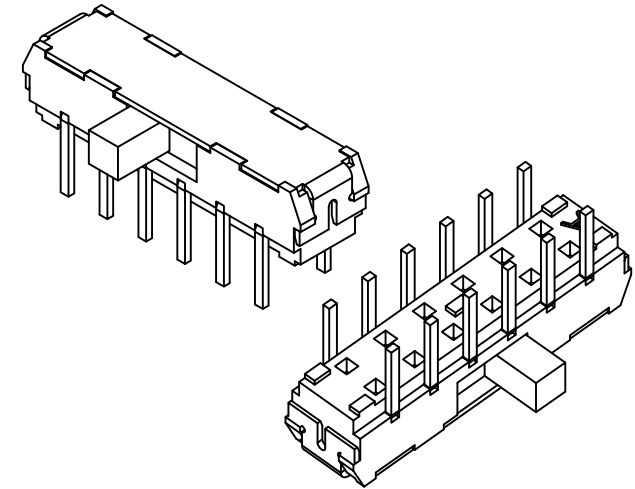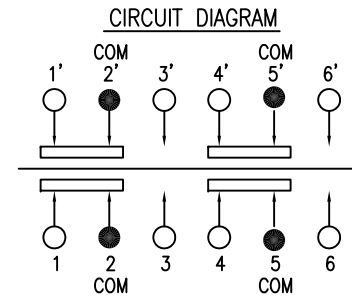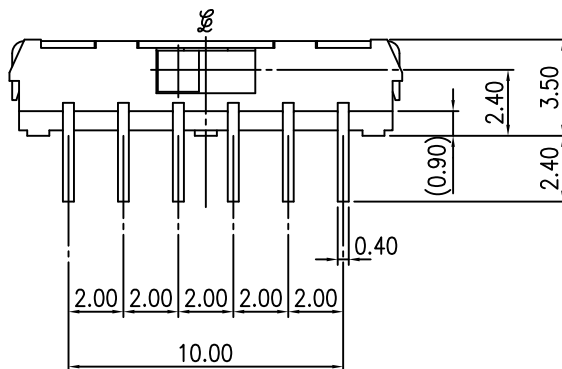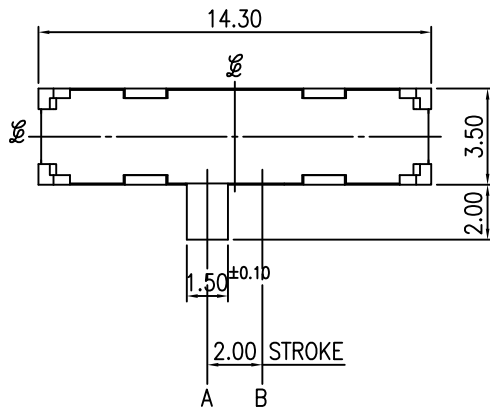

- SPECIFICATIONS:
- 1.RATING: 6VDC. 0.3A.
  - 2.CONTACT RESISTANCE: 70mΩ MAX.
  - 3.INSULATION RESISTANCE: 500VDC-100MΩ MIN.
  - 4.WITHSTAND VOLTAGE: 500VAC-1 MINUTE
  - 5.OPERATING FORCE: 200±150gf
  - 6.CIRCUIT: 4 POLE 2 THROW
  - 7.STROKE: 2.0±0.3mm
  - 8.LIFE CYCLE: 10,000 CYCLES

P.C.B. LAYOUT

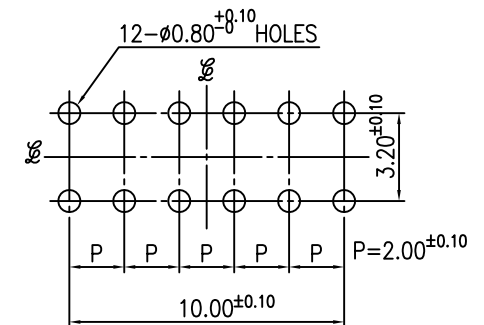

NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	FRAME	PA+G	1	
2	COVER	SUS301	1	
3	SLIDER	PA+G	1	
4	TERMINAL	BSR2	12	Ag PLATED
5	CONTACT PLATE	PBS	4	Ag PLATED



**TACLEX**

*TACLEX ELECTRONICS CO., LTD.*

TOLERANCES UNLESS  
OTHERWISE SPECIFIED  
LINEAR: ±0.30 ANGULAR: ±3°

SIGNATURES

DATE

TITLE

DRAWN

James

2007.06.15

SLIDE SWITCH

CHK'D

Andy

2007.06.15

NO.

SSA-200

REVISIONS  
A



SCALE  
5/1

APPV'D

Rex

2007.06.15

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED