

FEATURES

- ※PC board terminals option
- ※Solder terminals option with wire
- ※IP67 dust and water resistance
- ※With Internal Resistors option

APPLICATION

- ※White goods
- ※Automotive
- ※Motorcycle

SPECIFICATION

Contact Rating	1mA, 5V DC 0.1A, 30V DC
Contact Resistance	1Ω max.
Insulation Resistance	100MΩ min.
Dielectric Strength	600V AC/1 minute
Operating Force	153gf max.
Operating Position	NC OP 8.7±0.3mm NO OP 8.4±0.3mm
Operating Life	10mA, 14V DC 500,000 cycles 0.1A, 30V DC 200,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

ESG - **V**

Cover Type: ☐
1=M3 Screw Mounting

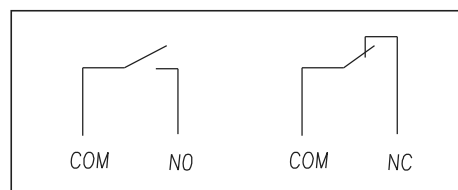
Rating: _____
G=Contact Silver Plated

Actuator:——
0=Pin Plunger

- Lead Free

- Terminal Type:
1=PC Board Terminal Type
2=Lead Terminal Type

Contact Form:
1=SPDT

CIRCUIT

PACKAGE

<Bag>

250 pcs

ESG

